



BRAD BARS

Copy of 1532 GRAYBAR- ...

Oct 26th, 2024

Build.com

KITCHEN



Frigidaire PCFG3670AF

36 Inch Wide 4.4 Cu. Ft. Free Standing
Gas Range with True Convection

Qty: 1

Finish: Stainless Steel



Trade-Wind VSL4366RC

VSL400 Series 600 CFM 36 Inch Wide
Range Hood Insert with Remote and LED

Qty: 1

Finish: Stainless Steel




Frigidaire PDSH4816AF

Professional 24 Inch Wide 14 Place Setting
Built-In Top Control Dishwasher with 8

Qty: 1

Finish: Stainless Steel



Whirlpool UMCS5022RZ

25 Inch Wide 2.2 Cu. Ft. 1200 Watt
Fingerprint Resistant Countertop

Qty: 1

Finish: Fingerprint Resistant Stainless
Steel



Whirlpool MTK2230PZ

30 Inch Wide Trim Kit for Countertop
Microwave

Qty: 1

Finish: Fingerprint Resistant Stainless
Steel



JennAir JBSFS48NMX

48 Inch Wide 29.4 Cu. Ft. Built-In
Refrigerator With Obsidian Interior

Qty: 1

Finish: Panel Ready



JennAir W10663565

48 Inch Wide Armoire Style Refrigerator
Door Panel

Qty: 1

Finish: Obsidian



KITCHEN

	Spec Sheets	Installation Guide	Warranty Info	Owners Manual	Additional Documents
Frigidaire PCFG3670AF	✓	–	–	–	–
Trade-Wind VSL4366RC	✓	–	–	–	–
Frigidaire PDSH4816AF	✓	–	–	–	–
Whirlpool UMCS5022RZ	✓	–	–	–	–
Whirlpool MTK2230PZ	–	–	–	–	–
JennAir JBSFS48NMX	✓	–	–	–	–
JennAir W10663565	–	–	–	–	–



36" Front Control Freestanding Gas Range

Gas Range

Available Products: PCFG3670AF

Available Colors: Stainless Steel

Version: 07/22

Product Specifications

Cooktop

Cooking Surface Type	Gas
Grate Material	Cast Iron
Grate Quantity	3
Grate Style	Continuous
Sealed Burners	Yes

Cooking Controls

Bake	Yes
Bread Proof	Yes
Broil	Yes
Child Lock	Yes
Convection Bake	Yes
Convection Roast	Yes
Cook Time	Yes
Delay Start	Yes
Keep Warm	Yes
Kitchen Timer	Yes
Probe	Yes
Self Clean	No
Temperature Display	Yes

Controls

Sabbath Mode	No
--------------	----

Exterior

Backlit Knobs	Yes
---------------	-----

Electrical Specifications

Amps @ 120 Volts	9.2 Amps
Connected Load @ 120V	1.1 kW
Minimum Circuit Required	15 Amps

General Specifications

Warranty - Labor	1 Year
Warranty - Parts	1 Year

Safety Certifications and Approvals

CSA Listed	Yes
RoHS	Yes

Cooktop Performance

Right Front Element Burner	18,000 / 750 BTU Dual
Left Front Element Burner	18,000 / 750 BTU Dual
Right Rear Element Burner	12,000 / 750 BTU Dual
Left Rear Element Burner	12,000 / 750 BTU Dual
Center Front Element Burner	12,000 / 750 BTU Dual
Center Rear Element Burner	12,000 / 750 BTU Dual

Oven

Bake Element Type	Hidden
Bake Element	17,000 BTU
Broil Element	14,000 BTU
Convection	Yes
Convection Type	True
Convection Element	1,000 Watts
Rack Position Type	Ladder
Number of Rack Positions	5
Rack Type 1	Flat
Rack Type 1 Quantity	2
Rack Type 2	Glide
Rack Type 2 Quantity	1
Oven Interior Color	Gray
Window Type	Extra Large Visual
Oven Light Type	Halogen
Oven Light Quantity	2
Oven Light Watts	40 Watts
Number of Convection Fans	1

Display

Display Light Color	White
Display Type	LED
Control Location	Front

Dimensions and Volume

Width	35 15/16"
Depth	25 7/8"
Depth With Door 90° Open	43 15/16"
Oven Interior Height	15 1/16"
Oven Interior Width	28 7/16"
Oven Interior Depth	17 1/2"
Minimum Height	35 9/16"
Maximum Height	36 9/16"
Oven Capacity	4.4 Cu. Ft.

36" Front Control Freestanding Gas Range	Gas Range
Available Products: PCFG3670AF	Available Colors: Stainless Steel
Version: 07/22	

Installation


Adjustable Leveling Legs	Yes
LP Conversion Kit Included	Yes
Plinth	Yes

Certifications and Approvals

ADA Compliant	Yes
---------------	-----

Installation Diagram


Product Dimensions

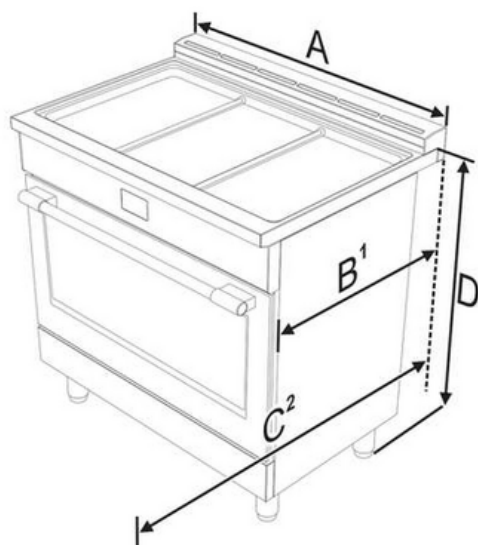

A	912.4 mm	35 15/16"
B¹	min: 654 mm max: 658 mm	min: 25 3/4" max: 25 7/8"
C²	1116 mm	43 15/16"
D	min: 903 mm max: 929 mm	min: 35 9/16" max: 36 9/16"

1. Measurement **B** varies according to the model: the minimum is obtained without the rear spacers (see "Island installation") and the maximum is obtained for traditional installation (slot-in installation - with the rear spacers).
2. Measurement **C** refers to the open door.

Cabinet clearances

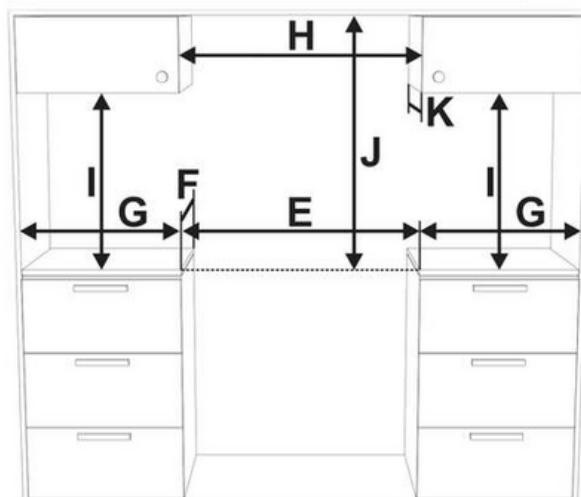

E	min. 914 mm	min. 36"
F	628 mm	24" 5/8
G	min. 508 mm	min. 20"
H	min. 914 mm	min. 36"
I	min. 457 mm	min. 18"
J	see notes below	
K	max. 330 mm	max. 13"

Clearance **J** can have the following values:

- **J = 42" / 1067 mm** minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet.
- **J = 30" / 762 mm** minimum when the bottom of wood or metal cabinet is protected by not less than 1/4-inch-thick flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015-inch-thick stainless steel, 0.024-inch-thick aluminum, or 0.020-inch-thick copper. Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 30" should be approved by the local codes and/or by the local authority having jurisdiction.

PERFORMANCE · QUALITY · CUSTOMER SERVICE

QUIET OPERATION

- Large 3-speed blower operates at lower RPM reducing the sound level

ENDURING QUALITY

- Commercial grade stainless steel (#304 grade) and galvanized steel construction
- LED lights brighten cooking area
- CFM and sound tested by Energy Systems Laboratory at Texas A&M University

DISTINCTIVE LOW-PROFILE DESIGN

- Style complements ALL custom and manufactured wood hood designs
- Simplicity of design preferred by homeowners



EASE OF OPERATION


- Remote control included with purchase
- Optional automatic 5 minute shut off timer
- Electronic touch controls with blue LED lighting

SIMPLE INSTALLATION

- Installs easily in standard size or custom-built wood range hoods
- Wiring diagram label for simple electrical connection


EASY CLEANING

- Dishwasher-safe commercial-style baffle filters with 2 easy-grip handles
- Detergent inlet holes and grease exit holes in baffle filters for superior dishwasher cleaning

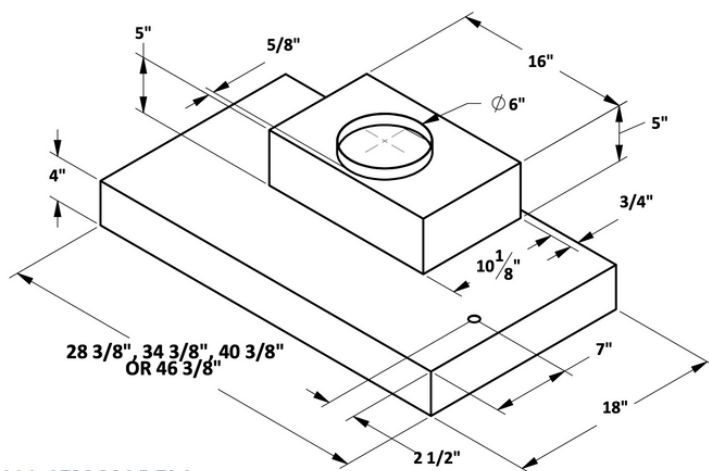

290 CFM MODELS


OPTIONAL DUCTLESS CONVERSION KIT MODEL#: 5BL-39-400-DCK;
5BL-39-400-DCK1 (VSL4482RC ONLY)

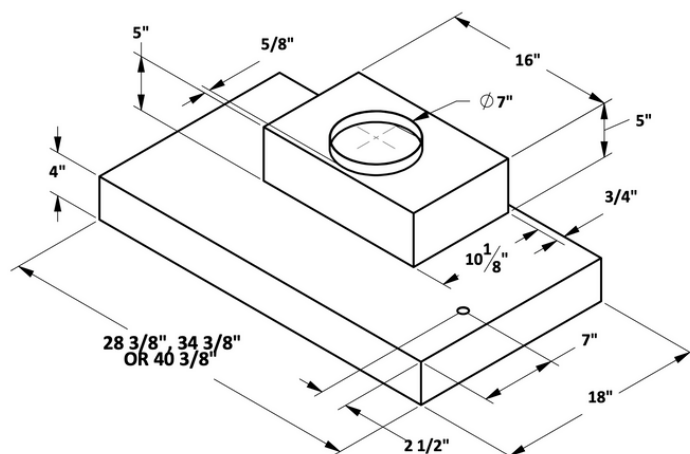


390 CFM MODELS

OPTIONAL DUCTLESS CONVERSION KIT MODEL#: 5BL-39-400-DCK

MODEL	FRONT TO BACK	WIDTH	COLOR	3-SPEED INTERNAL BLOWER	CFM	LED LIGHTS	S/S BAFFLE FLITERS	REMOTE CONTROL	DUCT COLLAR	ELECTRONIC TOUCH CONTROL
VSL4302RC	18"	28 3/8"	S/S	✓	290	2	✓	✓	6"	✓
VSL4303RC	18"	28 3/8"	S/S	✓	390	2	✓	✓	7"	✓
VSL4304RC	18"	28 3/8"	S/S	✓	390	2	✓	✓	3 1/4" x 10"	✓
VSL4306RC	18"	28 3/8"	S/S	✓	600	2	✓	✓	8"	✓
VSL4362RC	18"	34 3/8"	S/S	✓	290	2	✓	✓	6"	✓
VSL4363RC	18"	34 3/8"	S/S	✓	390	2	✓	✓	7"	✓
VSL4364RC	18"	34 3/8"	S/S	✓	390	2	✓	✓	3 1/4" x 10"	✓
VSL4366RC	18"	34 3/8"	S/S	✓	600	2	✓	✓	8"	✓
VSL4422RC	18"	40 3/8"	S/S	✓	290	2	✓	✓	6"	✓
VSL4423RC	18"	40 3/8"	S/S	✓	390	2	✓	✓	7"	✓
VSL4424RC	18"	40 3/8"	S/S	✓	390	2	✓	✓	3 1/4" x 10"	✓
VSL4426RC	18"	40 3/8"	S/S	✓	600	2	✓	✓	8"	✓
VSL44212RC	18"	40 3/8"	S/S	✓	1200	2	✓	✓	10"	✓
VSL4482RC	18"	46 3/8"	S/S	✓	290	3	✓	✓	6"	✓
VSL4486RC	18"	46 3/8"	S/S	✓	600	3	✓	✓	8"	✓
VSL44812RC	18"	46 3/8"	S/S	✓	1200	3	✓	✓	10"	✓
VSL45412RC	18"	52 3/8"	S/S	✓	1200	3	✓	✓	10"	✓
VSL46012RC	18"	58 3/8"	S/S	✓	1200	3	✓	✓	10"	✓
VSL47212RC	18"	70 3/8"	S/S	✓	1200	4	✓	✓	10"	✓

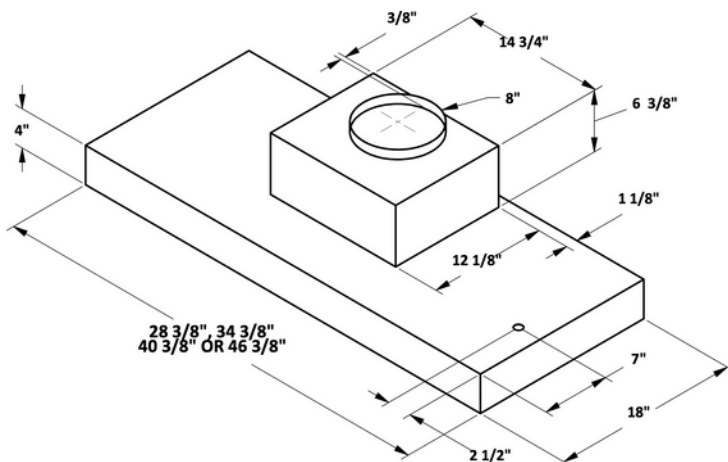

600 CFM MODELS

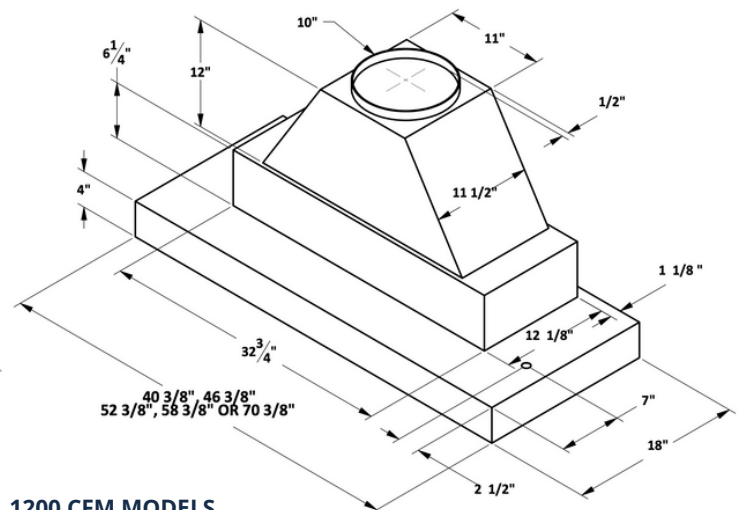

1200 CFM MODELS




800 WEST GRANT STREET
PHOENIX, AZ 85007
1-800-955-5737
602-900-8500
T - WUSA.COM



TRADE-WIND Manufacturing, LLC has a policy of continuous improvements and reserves the right to modify (at any time without notice) any or all of its products, features, designs, components and specifications. For further information on installation and wiring, see the installation instructions included with the product or visit us on the web.

© 2023 TRADE-WIND MANUFACTURING, LLC

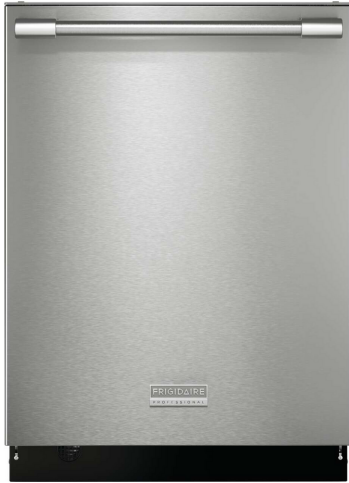

24" Stainless Steel Tub Built-In Dishwasher with CleanBoost™

Dishwasher

Available Products: PDSH4816AF

Available Colors: Stainless Steel

Version: 07/23

Product Specifications

Dishwasher

Automatic Temperature Control	No
Detergent Dispenser	Yes
Filter Material	Stainless Steel
Filter Trap	Removable
Filtered Water	100 %
Hard Food Disposer or Filtration	Yes
Interior Light	No
Leak Detection System	Yes
Motor Speeds	Multi-Speed
Place Setting Capacity	14
Rinse Aid Dispenser	Yes
Smart Soil Sensor	Yes
Lower Spray Arm	Orbit
Middle Spray Arm	Bi-Beam
Upper Spray Arm	Spray Arm
Status Indicator Floor Beam	Yes
Tub Color	Stainless Steel
Tub Design	Tall Tub
Tub Material	Stainless Steel
Wash Levels	5
Wash System	Direct Feed

Dishwasher Options

Air Dry	Yes
Dry - Air	Yes
Dry - Heat	Yes
Dry - Max	Yes
Drying System	Even Dry
Heated Dry	Yes
Start/Cancel	Yes

Upper Rack

Cup Shelf	Yes
Fold-Down	Yes
Maximum Height Clearance	10 3/8"
Minimum Height Clearance	8 1/2"
Rack Coating	Nylon
Rack Handles	Yes
Rack Type	Deluxe
Stemware Holder	Yes
Targeted Wash Zone	Yes

Dishwasher Cycles

China Crystal	Yes
Energy Saver	Yes
Favorite	Yes
Heavy	Yes
Normal	Yes
Number of Cycles	8
Quick	Yes
Rinse Only	Yes
Sanitize	Yes

Lower Rack

Fold-Down	Yes
Maximum Height Clearance	13 1/4"
Minimum Height Clearance	11 1/4"
Number of Silverware Basket	1
Number of Silverware Basket Lids	2
Rack Coating	Nylon
Rack Type	Deluxe

Third Level Rack

Third Level Rack	Yes
Rack Coating	Nylon
Rack Handles	No

Exterior

Door and Handle Design	Handle
Door Latch	Pull
Door Type	StayPut

Electrical Specifications

Amps @ 120 Volts	15 Amps
Voltage Rating	120 V

General Specifications

Sound Level	47 dBA
Annual Energy	240 kWh
Prop 65 Label	No
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Performance Certifications and Approvals

CEE Tier	Tier 1
ENERGY STAR Certified	Yes

24" Stainless Steel Tub Built-In Dishwasher with CleanBoost™	Dishwasher
Available Products: PDSH4816AF	Available Colors: Stainless Steel
Version: 07/23	

Controls

Control Location	Top
Delay Start Hours	1-12 Hours
Digital Display	Yes
Control Lock	Yes
Rinse Aid Indicator	Yes

Dimensions and Volume

Minimum Height	33 3/4"
Maximum Height	35 3/4"
Width	24"
Depth	24 1/4"
Depth With Door Open	50 1/4"

Installation

Number of Leveling Legs	3
-------------------------	---



Certifications and Approvals

ADA Compliant	No
---------------	----

Safety Certifications and Approvals

UL Listed	Yes
cUL Listed	Yes
Meets ASSE 1006 Requirements	Yes
NSF Certified	Yes


Installation Diagram

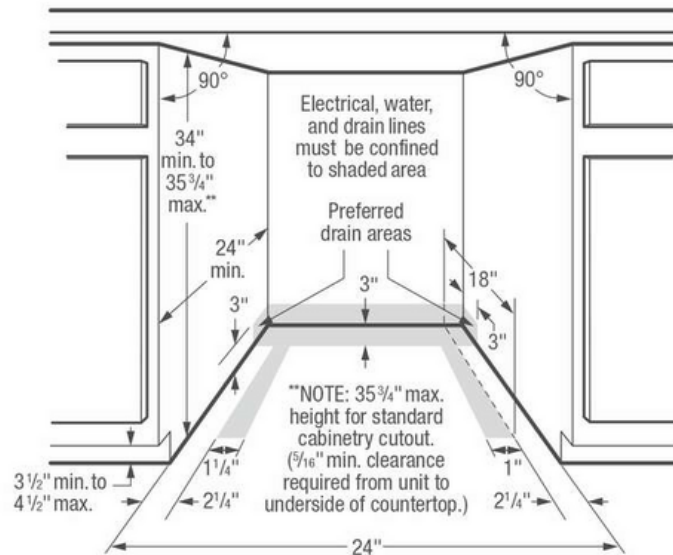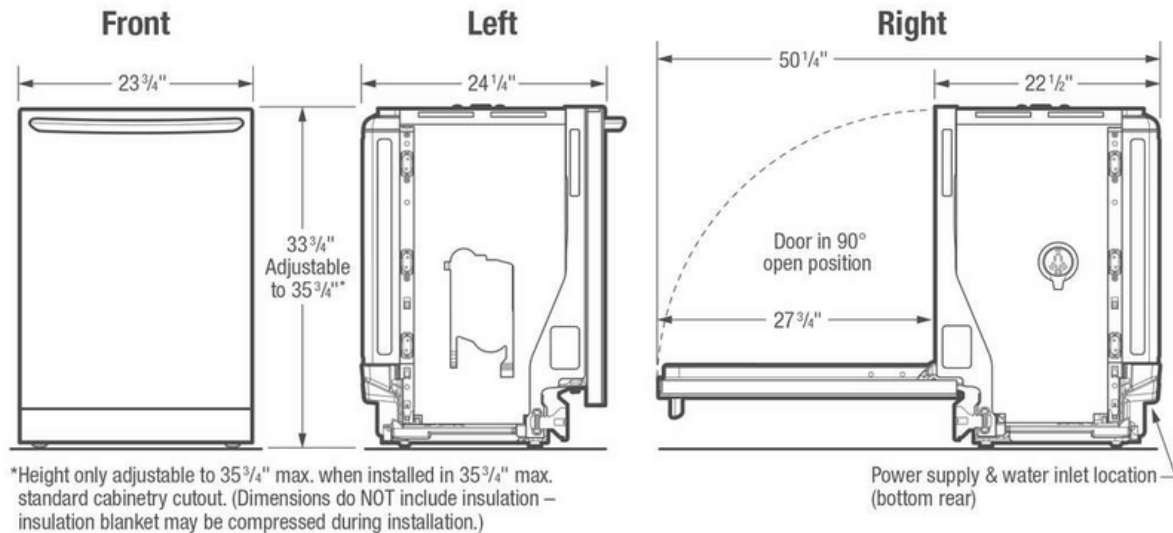


MICROWAVE OVEN

PRODUCT DIMENSIONS


MODEL #	WMCS7024RW/WMCS7024RB/ WMCS7024RZ/UMCS5022RZ	
Unit of Measurement	in	cm
Overall Width (A)	24 ³ / ₄	62.8
Overall Height (B)	14 ³ / ₁₆	36.1
Height of the door (C)	13 ¹ / ₈	33.3
Depth without door (D)	18 ⁵ / ₈	47.3
Depth with door (E)	18 ⁵ / ₁₆	46.5
Depth with door open 90° (F)	38 ¹ / ₄	98.7

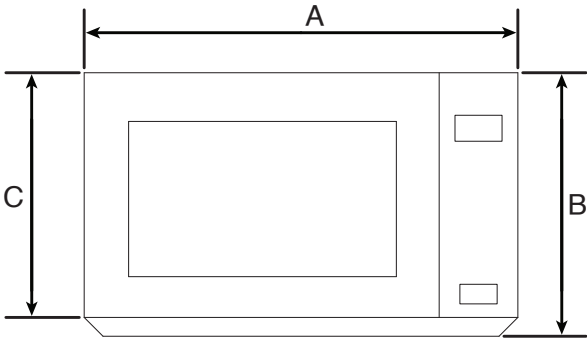

FRONT VIEW

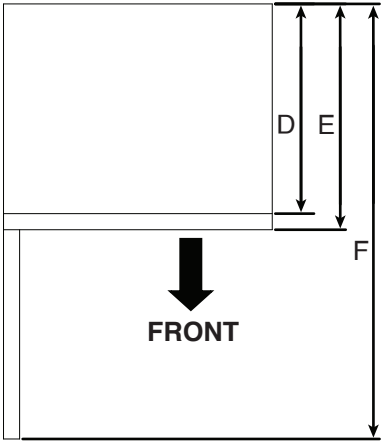

TOP VIEW

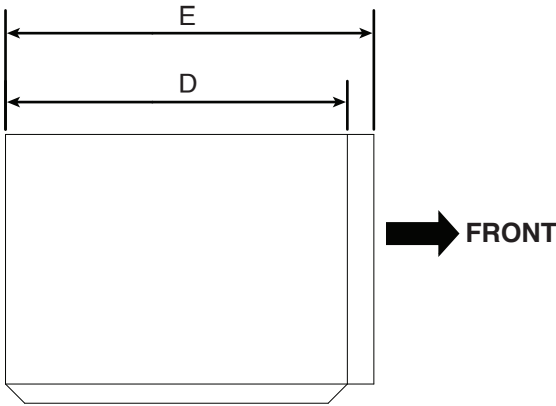


SIDE VIEW

NOTE: Specifications subject to change without notice.


MICROWAVE OVEN

MICROWAVE INTERIOR CAVITY DIMENSIONS


MODEL #	WMCS7024RW/WMCS7024RB/ WMCS7024RZ/UMCS5022RZ	
Unit of Measurement	in	cm
Cavity Height (A)	11 ⁹ / ₁₆	29.4
Cavity Width (B)	18 ⁷ / ₁₆	46.9
Cavity Depth (C)	18 ⁵ / ₈	47.3

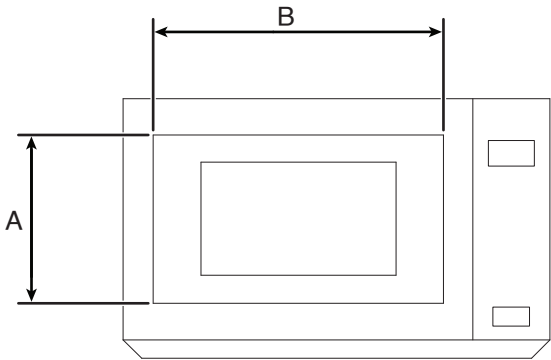

CAVITY INTERIOR FRONT VIEW

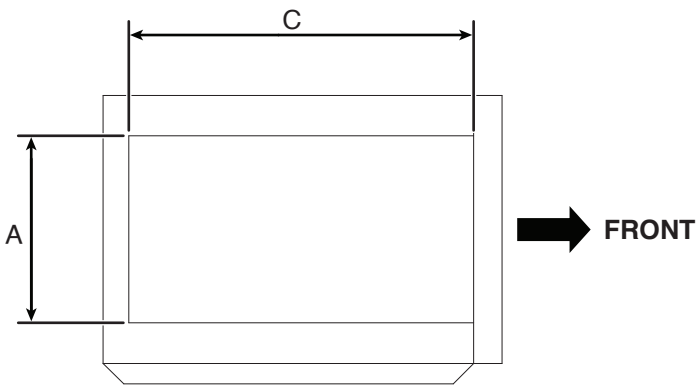

CAVITY INTERIOR SIDE VIEW

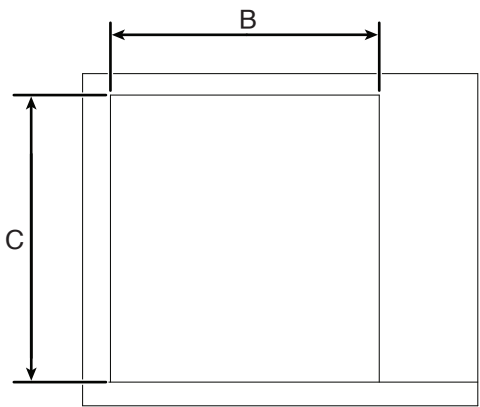

FRONT


CAVITY INTERIOR TOP VIEW

NOTE: Specifications subject to change without notice.


HORNO DE MICROONDAS

DIMENSIONES DEL PRODUCTO


N.º DE MODELO	WMCS7024RW/WMCS7024RB/ WMCS7024RZ/UMCS5022RZ	
Unidad de medida	pul	cm
Ancho total (A)	24 ³ / ₄	62,8
Altura total (B)	14 ³ / ₁₆	36,1
Altura de la puerta (C)	13 ¹ / ₈	33,3
Profundidad sin puerta (D)	18 ⁵ / ₈	47,3
Profundidad con puerta (E)	18 ⁵ / ₁₆	46,5
Profundidad con puerta abierta a 90º (F)	38 ¹⁴ / ₁₆	98,7

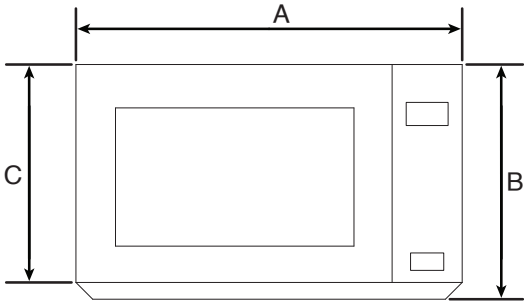

VISTA FRONTAL

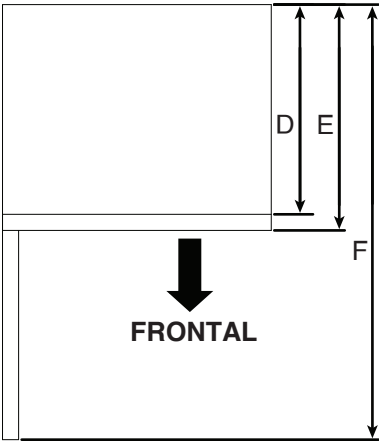

VISTA SUPERIOR

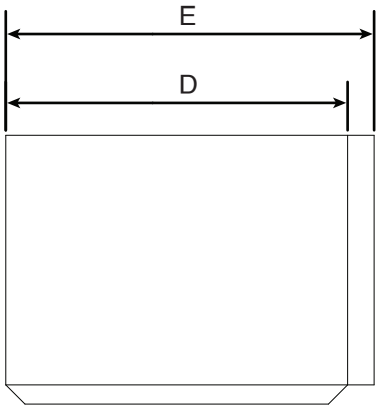


VISTA LATERAL

NOTA: Las especificaciones están sujetas a cambios sin previo aviso.


HORNO DE MICROONDAS

DIMENSIONES DE LA CAVIDAD INTERIOR DEL MICROONDAS


N.º DE MODELO	WMCS7024RW/WMCS7024RB/ WMCS7024RZ/UMCS5022RZ	
Unidad de medida	pul	cm
Altura de la cavidad (A)	11 ⁹ / ₁₆	29,4
Ancho de la cavidad (B)	18 ⁷ / ₁₆	46,9
Profundidad de la cavidad (C)	18 ⁵ / ₈	47,3

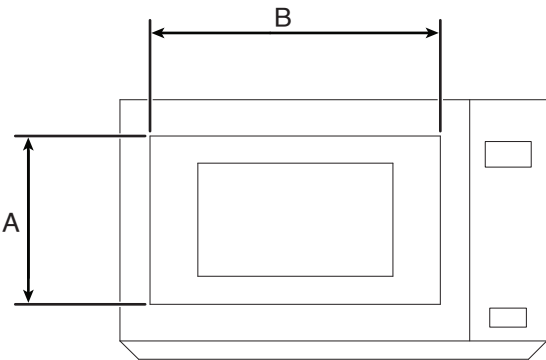

VISTA FRONTAL DE LA CAVIDAD INTERIOR

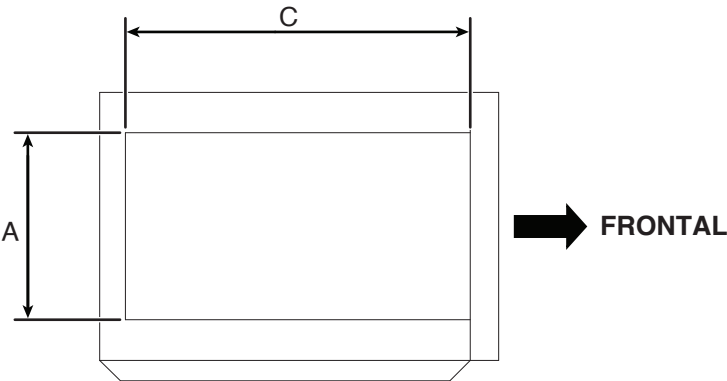


VISTA LATERAL DE LA CAVIDAD INTERIOR

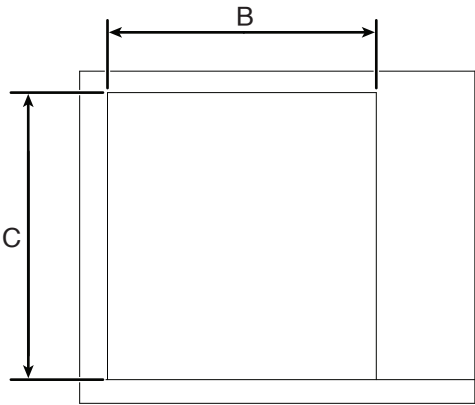


FRONTAL

VISTA SUPERIOR DE LA CAVIDAD INTERIOR

NOTA: Las especificaciones están sujetas a cambios sin previo aviso.

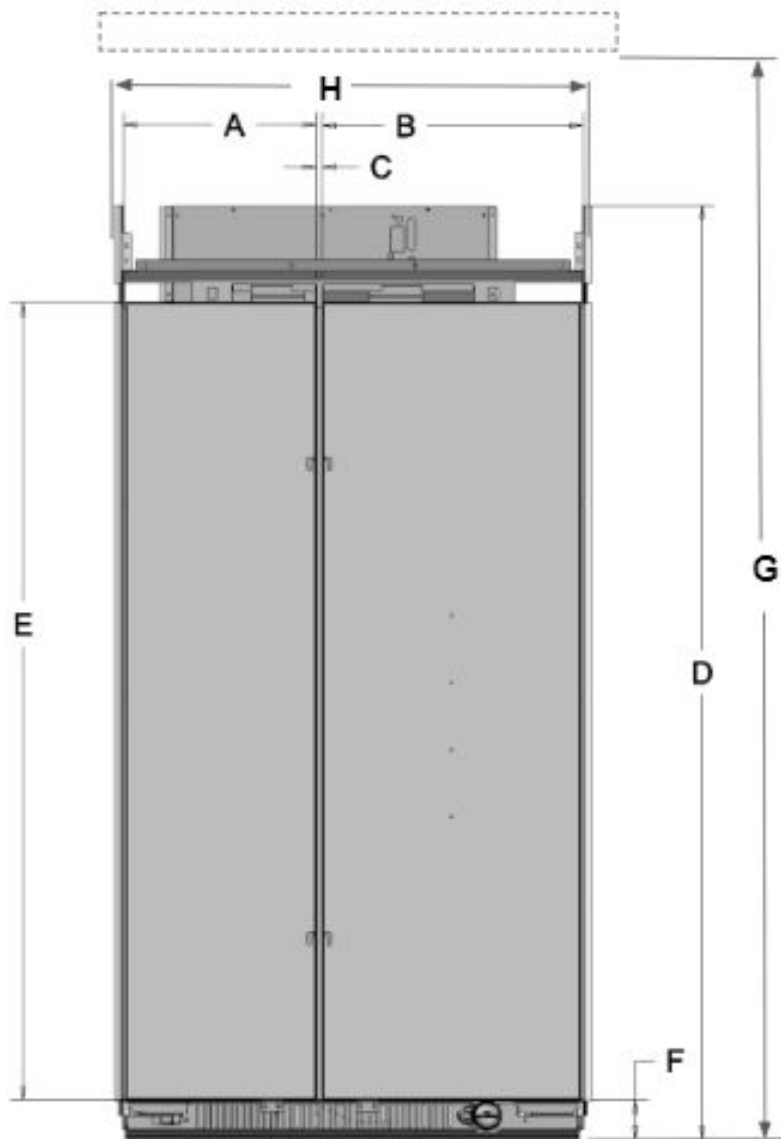


Description		Inches (cm)
A	Width of FC door	
	42"	17 ³ / ₁₆ " (43.7)
	48"	19 ³ / ₄ " (50.1)
B	Width of RC door	
	42"	23 ¹ / ₄ " (59)
	48"	26 ³ / ₄ " (67.9)
C	Space between doors	1/2" (1.3)
D	Total height	83 ¹ / ₄ " (211.4)
E	Height of doors	71" (180.5)
F	Height of grille	3 ⁹ / ₁₆ " (9.0)
G	To bottom of solid soffit (minimum/maximum)	83 ¹ / ₂ " (212.1)
		84 ⁵ / ₈ " (215)
H	Overall width with side trims	42 ³ / ₈ " (107.6)
		48 ³ / ₈ " (122.8)
I	Water line location distance from side	17 ³ / ₄ " (45.0)
J	Water line location distance from front	3 ¹ / ₄ " (8.2)

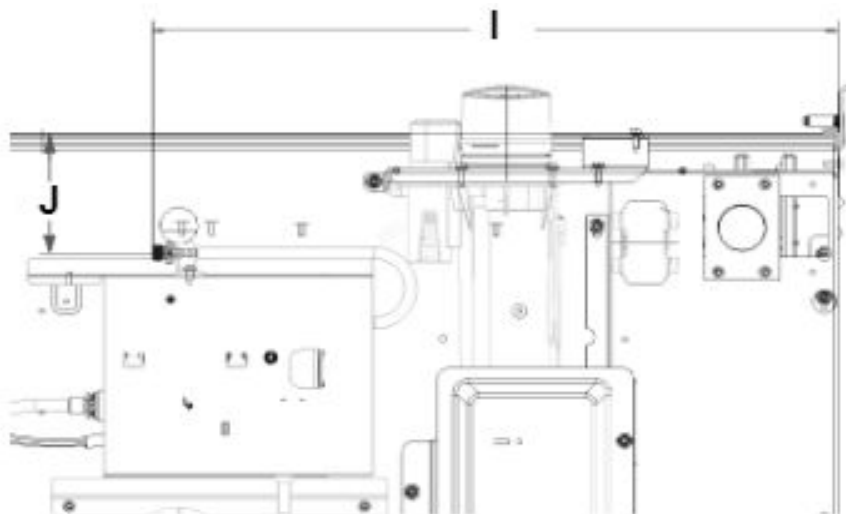

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Power chord location

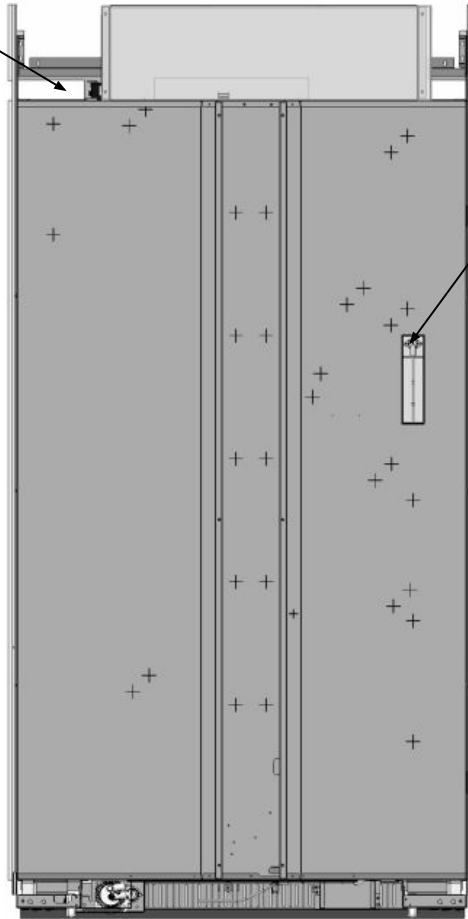

Water lines:
foamed in
and are external

Electrical Requirements

⚠ WARNING



Electrical Shock Hazard


Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.


Failure to follow these instructions can result in death, fire, or electrical shock.

	Power chord	
	Type	Length Inches (cm)
	Standard	60" (152.5)


Electrical: A 115V, 60 Hz, AC only, 15A or 20A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 30 and 120 psi (270 kPa and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

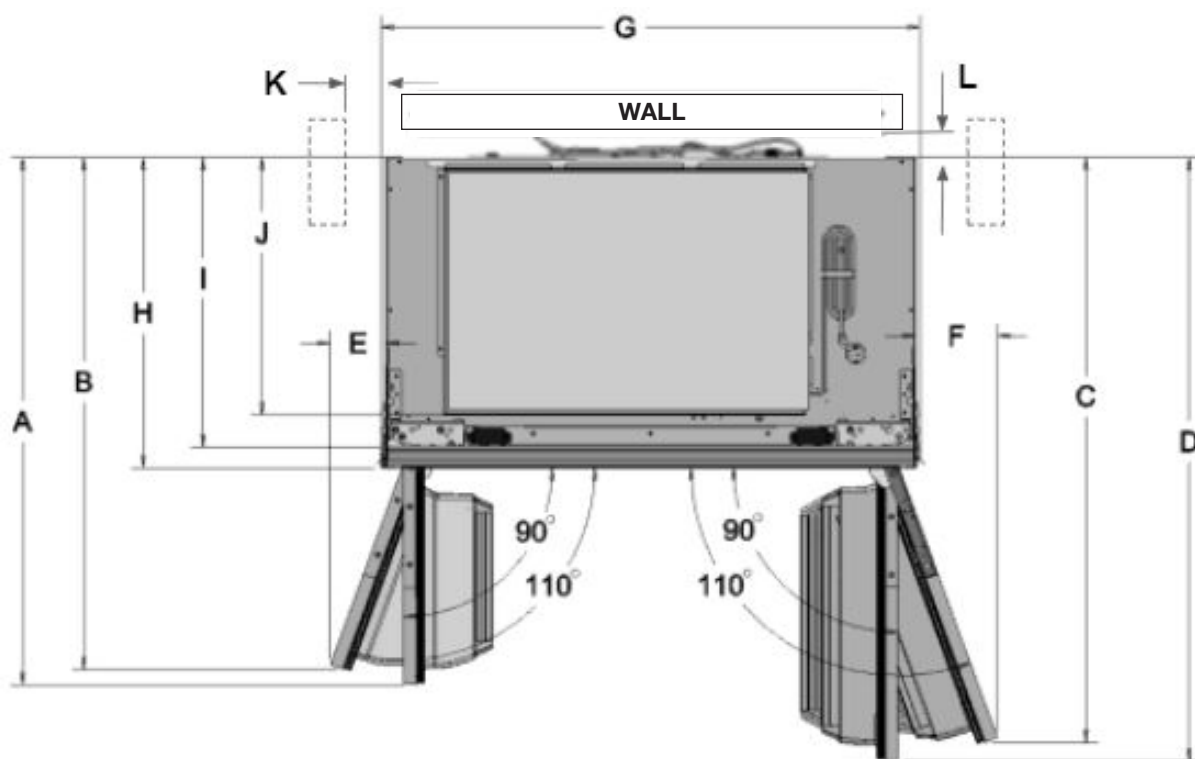

Description		Inches (cm)
A	Depth with FC door open 90°	
	42" 48"	40 ¹³ / ₁₆ " (103.7) 43 ¹ / ₈ " (109.6)
B	Depth with FC door open 110°	
	42" 48"	39 ⁵ / ₈ " (100.7) 41 ¹⁵ / ₁₆ " (106.5)
C	Depth with RC door open 110°	
	42" 48"	45 ⁵ / ₁₆ " (115.1) 48 ⁷ / ₁₆ " (123.4)
D	Depth with RC door open 90°	
	42" 48"	46 ³ / ₄ " (118.7) 50 ¹ / ₄ " (127.6)
E	From FC side of refrigerator to edge - door fully open 110°	
	42" 48"	4 ⁵ / ₁₆ " (10.9) 5 ³ / ₁₆ " (13.1)
F	From RC side of refrigerator to edge - door fully open 110°	
	42" 48"	6 ³ / ₈ " (16.2) 7 ⁹ / ₁₆ " (19.2)
G	Hinge edge to hinge edge	
	42" 48"	41 ³ / ₄ " (106) 47 ³ / ₄ " (121.3)
H	Depth without doors	24" (61)
I	Depth with doors	22 ³ / ₈ " (56.8)
J	Depth to machine compartment cover	19 ¹⁵ / ₁₆ " (50.6)
K	Space required for side cabinet	6" (15.24)
L	Space required for water lines and power chord	1" (2.54)

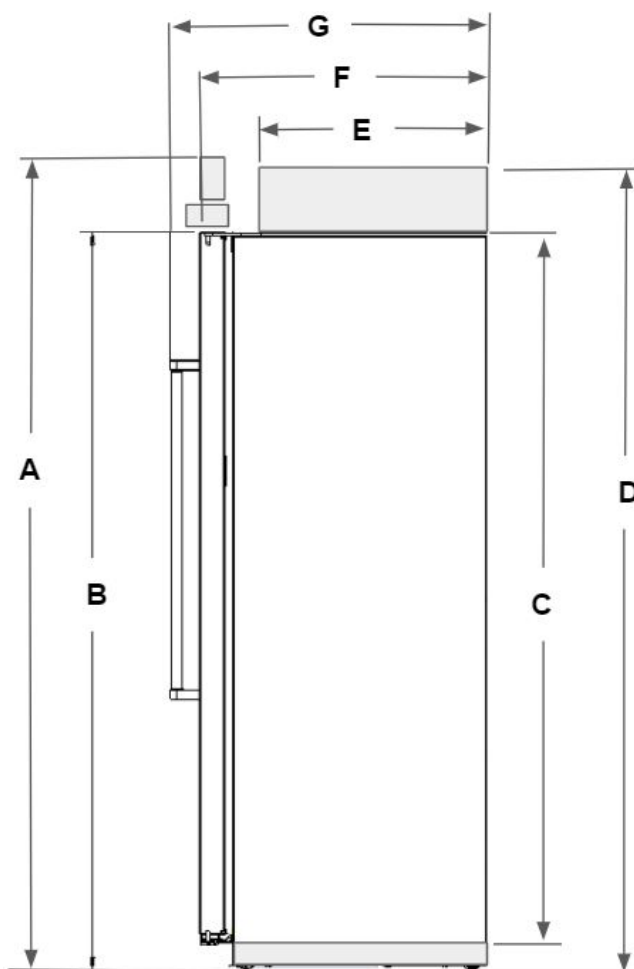

Description		Inches (cm)
A	Height to top of doors	74 ⁹ / ₁₆ " (189.4)
B	Height of Cabinet	71" (180.4)
C	Height to top of machine compartment cover	83 ³ / ₁₆ " (211.3)
D	Depth to machine compartment cover	19 ¹⁵ / ₁₆ " (50.6)
E	Depth without doors	22 ³ / ₈ " (56.8)
F	Depth with doors	24" (61)

Interior dimensions	Width Inches (cm)	Height Inches (cm)
Refrigerator Compartment		
42"	20 ¹³ / ₁₆ " (52.9)	67 ¹ / ₁₆ " (170.4)
48"	24 ⁵ / ₁₆ " (61.8)	
Freezer Compartment		
42"	14 ⁵ / ₁₆ " (36.4)	66 ³ / ₄ " (169.6)
48"	16 ¹³ / ₁₆ " (42.7)	

Location Requirements


⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from refrigerator.

Failure to do so can result in death, explosion, or fire.



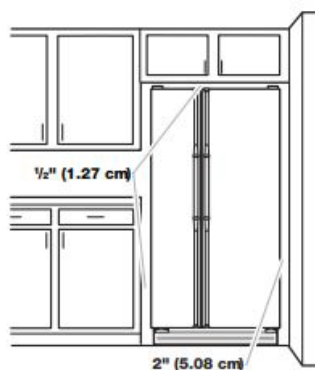


To ensure proper ventilation for your refrigerator, allow for 1/2" (1.27 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.





NOTES:

■ This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

■ Normal minimum cabinet cut-out width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.72 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.16 cm) is recommended.

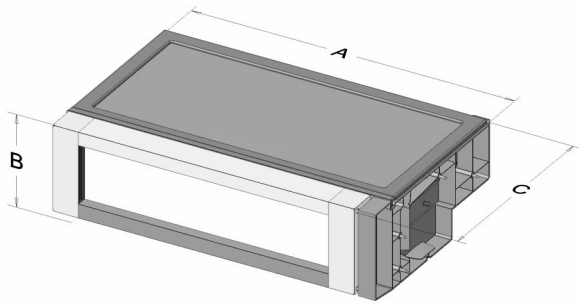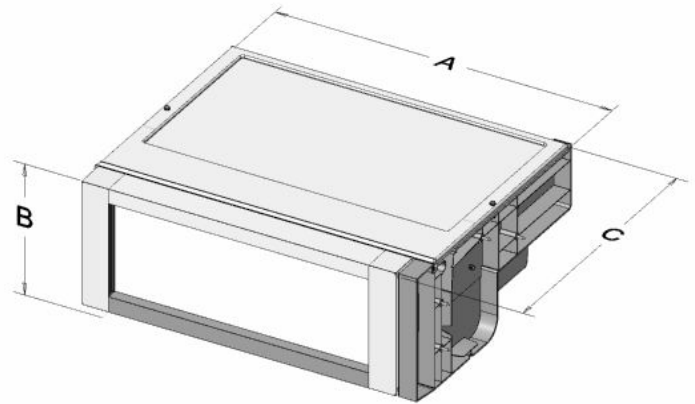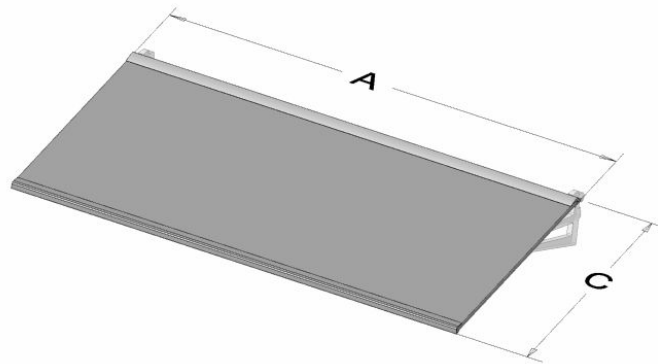
Meat Pan

Crisper Pan

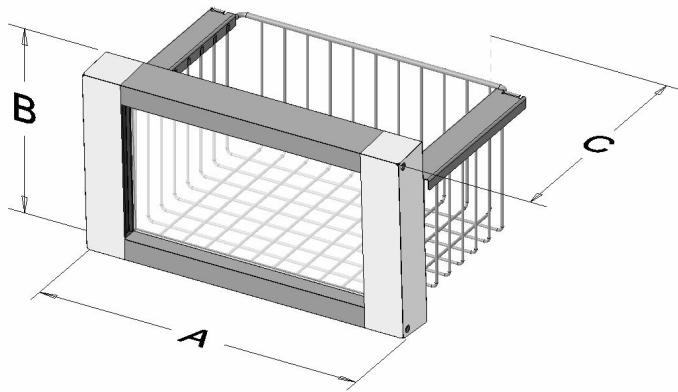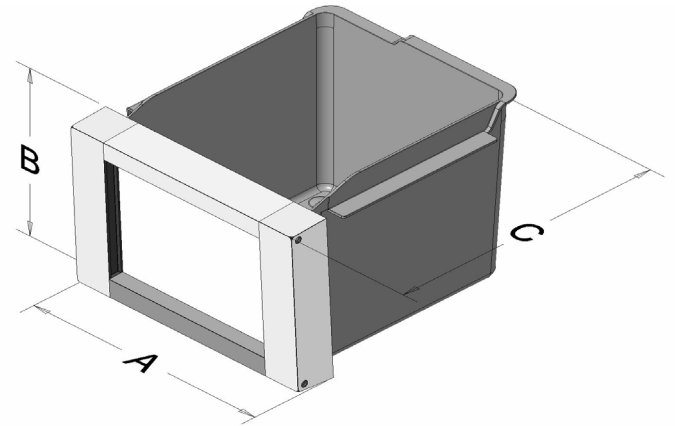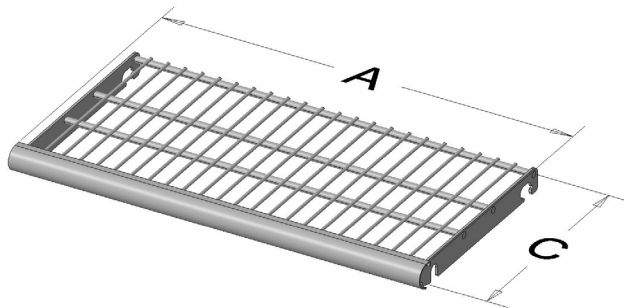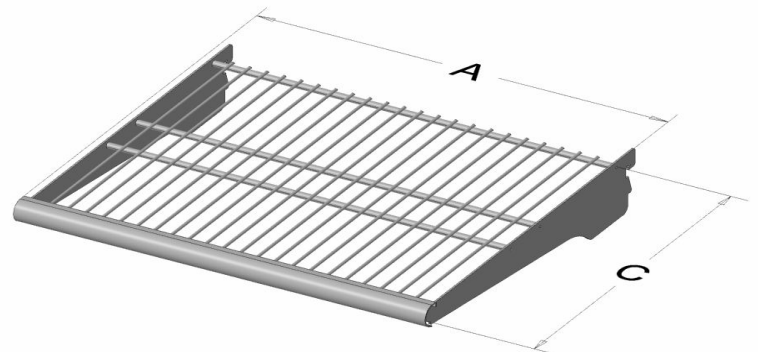Shelf
Refrigerator Compartment Features

Description	A Width Inches (cm)	B Height Inches (cm)	C Depth Inches (cm)
Meat pan			
42"	20 ¹¹ / ₁₆ " (52.5)	6 ¹ / ₈ " (15.6)	12 ⁵ / ₈ " (32.0)
48"	24 ³ / ₁₆ " (61.4)		
Crisper pan			
42"	20 ¹¹ / ₁₆ " (52.5)	7 ¹⁵ / ₁₆ " (20.1)	16 ⁵ / ₁₆ " (41.5)
48"	24 ³ / ₁₆ " (61.4)		
Shelf			
42"	20 ³ / ₈ " (51.7)	N/A	14 ³ / ₁₆ " (36.1)
48"	23 ⁷ / ₈ " (60.6)		


Basket Freezer

Ice Bin

Bottom Wire Shelf

Top Wire Shelf

Freezer Compartment Features			
Description	A Width Inches (cm)	B Height Inches (cm)	C Depth Inches (cm)
Basket Freezer			
42"	11 ³ / ₁₆ " (28.4)	8 ¹ / ₁₆ " (20.5)	10 ³ / ₁₆ " (25.9)
48"	13 ¹¹ / ₁₆ " (34.7)		
Ice Bin			
42"	11 ³ / ₁₆ " (28.4)	8 ³ / ₈ " (21.3)	12 ¹ / ₂ " (31.7)
48"	13 ¹¹ / ₁₆ " (34.7)		
Bottom Wire Shelf			
42"	13 ⁷ / ₈ " (35.3)	N/A	7 ³ / ₁₆ " (18.2)
48"	16 ⁷ / ₁₆ " (41.7)		
Top Wire Shelf			
42"	13 ⁷ / ₈ " (35.3)	N/A	11 ⁹ / ₁₆ " (29.3)
48"	16 ⁷ / ₁₆ " (41.7)		