

SKSRT480SIS
48-INCH DUAL-FUEL PRO RANGETOP WITH
SOUS-VIDE AND INDUCTION



BUILT-IN SOUS VIDE

The industry's first built-in sous vide delivering the ultimate in precision cooking, right on the cooktop. Get professional-style results every time and capture the full, true flavor of foods.

POWER-UP OR SIMMER DOWN

Two Ultra-High Burners deliver 23K BTUs of pure cooking power for better searing and quick stir frying. Two Ultra-Low Burners simmer down to maintain temperatures as low as 100° to prepare delicate sauces and sugary confections.

TWO-ZONE INDUCTION

When the recipe calls for instant temperatures and precision control, two induction zones meet the culinary need. The zones can be combined for use with a griddle, Teppanyaki plate or large cookware.

BUILT-IN WOK GRATE

The two front burner grates are convertible for round-bottom wok cooking. Stir fry at home with professional-style results.

Innovation

Wi-Fi Enabled for ThinQ® Control with iPhone / Android App	Yes
Remote Monitoring	Yes
Sous Vide Cooking	Yes

Cooktop Features

Number of Burners / Elements	
Sous Vide + 4 Burners + 2 Zone Induction	
Continuous Grates	2
Wok Convertible Grate (On Front Burners)	Yes
Heating Element "ON" Indicator Light	Yes
LED Power Level Display	Yes

Cooktop Performance

Simmer – Max. BTU/h (NG)	
Left Rear	310 – 15,000
Right Rear	310 – 15,000
Left Front	650 – 23,000
Right Front	650 – 23,000
Induction Cooktop (W)	
Front (Level 9 / Boost)	2,000 / 3,650
Rear (Level 9 / Boost)	2,000 / 3,650
Flex (Boost)	3,650
Sous Vide Module	800W

SKSRT480SIS

48-INCH DUAL-FUEL PRO RANGETOP WITH SOUS-VIDE AND INDUCTION



Controls

Knob Cooktop Controls w/LED Display	Yes
-------------------------------------	-----

Rangetop / General Features

Sealed Gas Burners (Brass)	Yes
Surface Material	Black Porcelain
Stainless Steel Side Panels	Yes

Technical Specs

Energy Source	Natural Gas and Electric
Alternative Energy Source	LP Gas and Electric
LP Conversion Kit Included	Yes
KW & Amp Rating at 240V	4.7 kW
Required Power Supply	240 / 208V, 60 Hz, 30 Amp

Dimensions and Weight

Overall Width (inches)	47 7/8"
Overall Height Including Grates (inches)	8 15/16"
Overall Depth Including Knobs (inches)	28 15/16"
Overall Depth without Knobs (inches)	26 3/4"
Net Weight (approx.)	193 lbs.
Shipping Weight (approx.)	261 lbs.

Accessories

Included Accessories:
2 Wok Grates, Sous Vide Bath, Sous Vide Rack

Warranty Summary*

Limited Warranty, Parts & Labor	3 Years
---------------------------------	---------

Natural Gas or LP

Gas Rangetops are shipped by the factory to operate on natural gas. If the location / job site requires conversion from natural gas to propane (LP), utilize the included LP kit. Conversion must be done by a qualified installer or service technician.


*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

SKSRT480SIS

48-INCH DUAL-FUEL PRO RANGETOP WITH SOUS-VIDE AND INDUCTION

SKS | SIGNATURE KITCHEN SUITE


CUTOUT DIMENSIONS

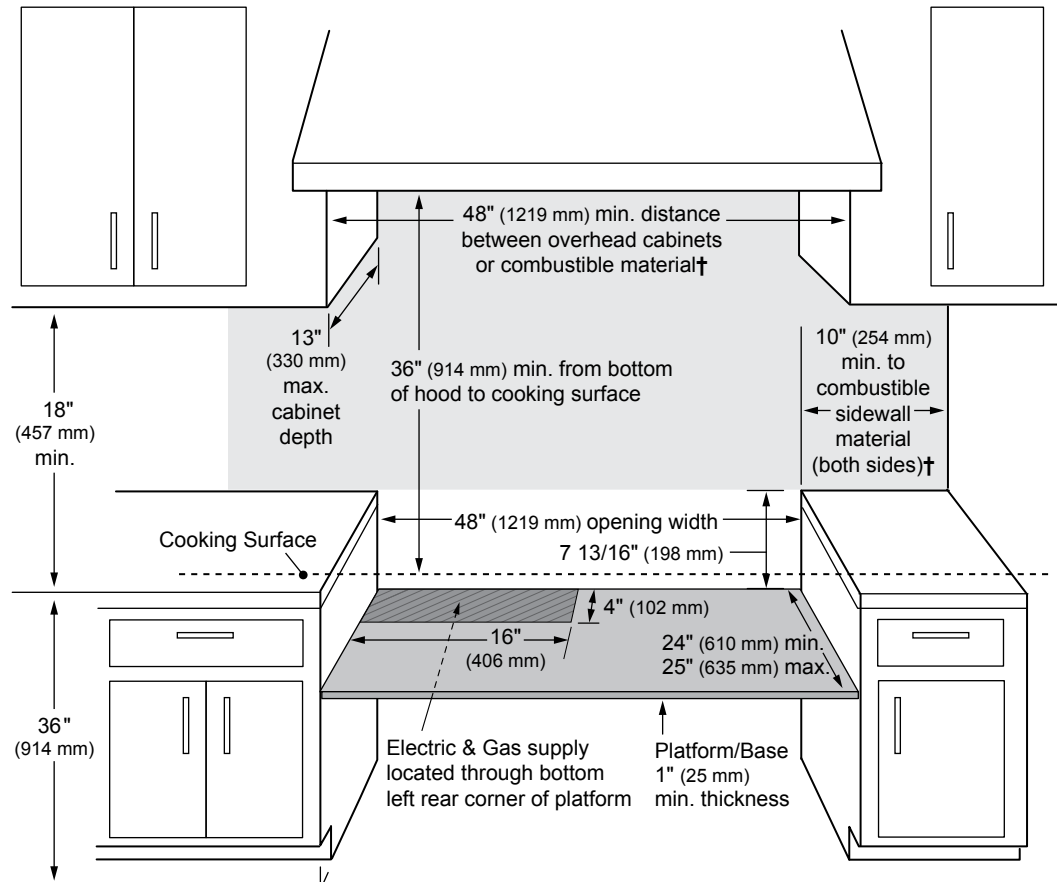

†As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 12" (305 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area. For island installation, 12" (305 mm) minimum clearance from back of rangetop.

OVERALL PRODUCT DIMENSIONS

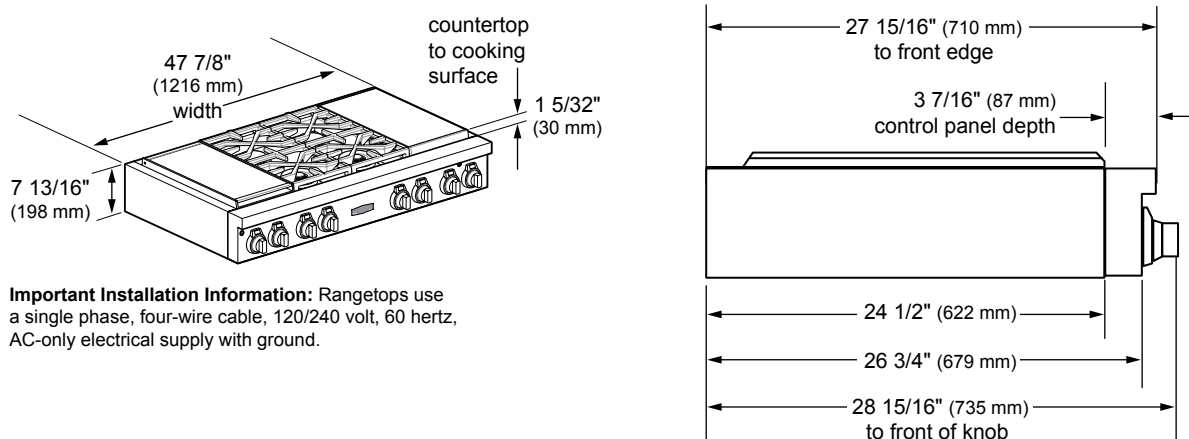

Important Installation Information: Rangetops use a single phase, four-wire cable, 120/240 volt, 60 hertz, AC-only electrical supply with ground.

PERFORMANCE · QUALITY · CUSTOMER SERVICE

QUIET OPERATION

- Large 3-speed blower operates at lower RPM reducing the sound level

ENDURING QUALITY

- Commercial grade stainless steel (#304 grade) and galvanized steel construction
- LED lights brighten cooking area
- CFM and sound tested by Energy Systems Laboratory at Texas A&M University

DISTINCTIVE LOW-PROFILE DESIGN

- Style complements ALL custom and manufactured wood hood designs
- Simplicity of design preferred by homeowners



EASE OF OPERATION


- Remote control included with purchase
- Optional automatic 5 minute shut off timer
- Electronic touch controls with blue LED lighting

SIMPLE INSTALLATION

- Installs easily in standard size or custom-built wood range hoods
- Wiring diagram label for simple electrical connection


EASY CLEANING

- Dishwasher-safe commercial-style baffle filters with 2 easy-grip handles
- Detergent inlet holes and grease exit holes in baffle filters for superior dishwasher cleaning

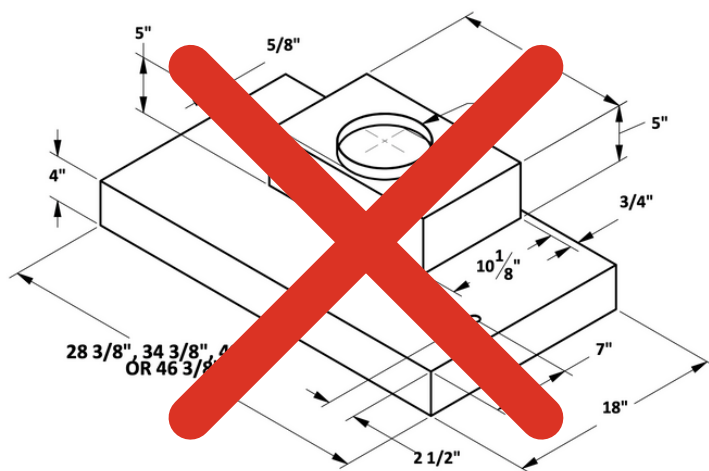

290 CFM MODELS

OPTIONAL DUCTLESS CONVERSION KIT MODEL#: 5BL-39-400-DCK;
5BL-39-400-DCK1 (VSL4482RC ONLY)

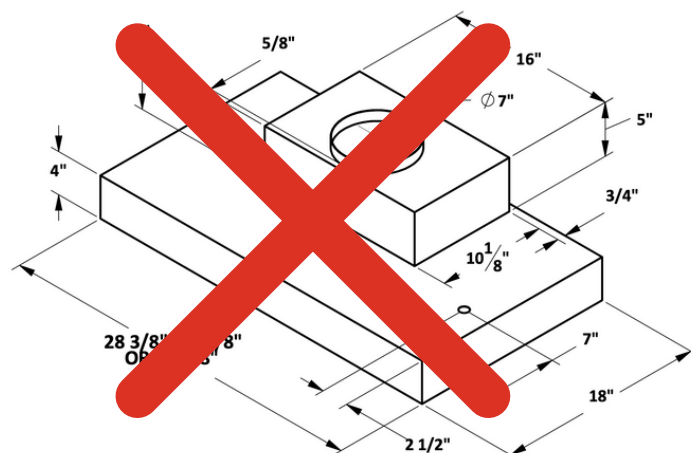


390 CFM MODELS

OPTIONAL DUCTLESS CONVERSION KIT MODEL#: 5BL-39-400-DCK




MODEL	FRONT TO BACK	WIDTH	COLOR	3-SPEED INTERNAL BLOWER	CFM	LED LIGHTS	S/S BAFFLE FILTERS	REMOTE CONTROL	DUCT COLLAR	ELECTRONIC TOUCH CONTROL
VSL4302RC	18"	28 3/8"	S/S	✓	290	2	✓	✓	6"	✓
VSL4303RC	18"	28 3/8"	S/S	✓	390	2	✓	✓	7"	✓
VSL4304RC	18"	28 3/8"	S/S	✓	390	2	✓	✓	3 1/4" x 10"	✓
VSL4306RC	18"	28 3/8"	S/S	✓	600	2	✓	✓	8"	✓
VSL4362RC	18"	34 3/8"	S/S	✓	290	2	✓	✓	6"	✓
VSL4363RC	18"	34 3/8"	S/S	✓	390	2	✓	✓	7"	✓
VSL4364RC	18"	34 3/8"	S/S	✓	390	2	✓	✓	3 1/4" x 10"	✓
VSL4366RC	18"	34 3/8"	S/S	✓	600	2	✓	✓	8"	✓
VSL4422RC	18"	40 3/8"	S/S	✓	290	2	✓	✓	6"	✓
VSL4423RC	18"	40 3/8"	S/S	✓	390	2	✓	✓	7"	✓
VSL4424RC	18"	40 3/8"	S/S	✓	390	2	✓	✓	3 1/4" x 10"	✓
VSL4426RC	18"	40 3/8"	S/S	✓	600	2	✓	✓	8"	✓
VSL44212RC	18"	40 3/8"	S/S	✓	1200	2	✓	✓	10"	✓
VSL4482RC	18"	46 3/8"	S/S	✓	290	3	✓	✓	6"	✓
VSL4486RC	18"	46 3/8"	S/S	✓	600	3	✓	✓	8"	✓
VSL44812RC	18"	46 3/8"	S/S	✓	1200	3	✓	✓	10"	✓
VSL45412RC	18"	52 3/8"	S/S	✓	1200	3	✓	✓	10"	✓
VSL46012RC	18"	58 3/8"	S/S	✓	1200	3	✓	✓	10"	✓
VSL47212RC	18"	70 3/8"	S/S	✓	1200	4	✓	✓	10"	✓

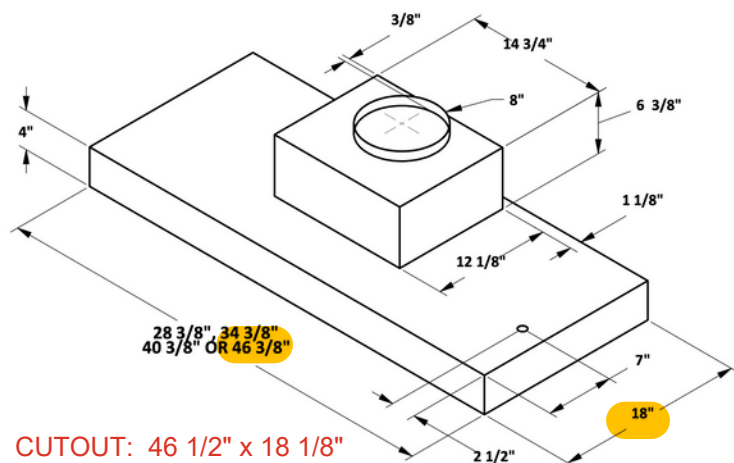

CUTOUT: 46 1/2" x 18 1/8"

600 CFM MODELS

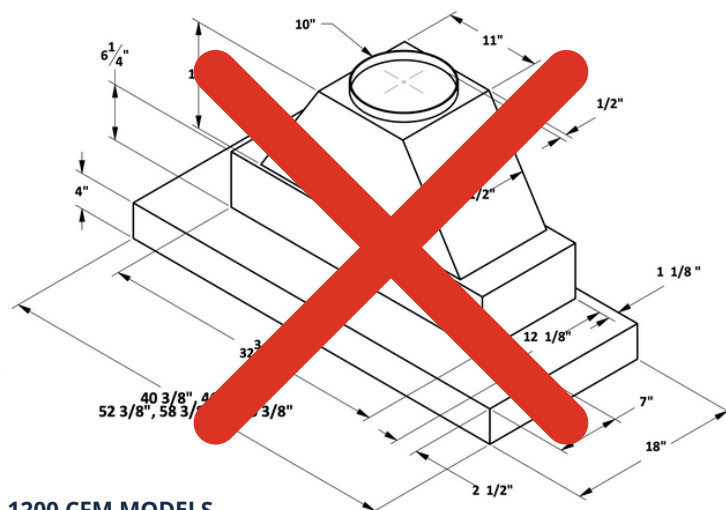

1200 CFM MODELS



800 WEST GRANT STREET
PHOENIX, AZ 85007
1-800-955-5737
602-900-8500
T - WUSA.COM



TRADE-WIND Manufacturing, LLC has a policy of continuous improvements and reserves the right to modify (at any time without notice) any or all of its products, features, designs, components and specifications. For further information on installation and wiring, see the installation instructions included with the product or visit us on the web.

© 2023 TRADE-WIND MANUFACTURING, LLC

SKSDV3002S

DOUBLE WALL OVEN WITH STEAM-COMBI

SKS | SIGNATURE
KITCHEN
SUITE



TRUE CONVECTION COOKING

The convection cooking system utilizes a third element and fan to cook food quickly and evenly, on every rack.

STEAM-COMBI CONVECTION OVEN

Versatile oven combines steam and convection cooking for gourmet results. The convection system cooks food quickly and evenly while steam helps to preserve texture, appearance and taste.

STEAM SOUS VIDE COOKING MODE

Enjoy sous vide results right in the spacious oven, without preheating. Achieve delicious results that are moist and tender on the inside, crisp and flaky on the outside, all with minimal effort.

SPEED-CLEAN™

Makes fast work of cleaning a lightly-soiled oven with just a ten minute cycle, using only water.

GLIDESHUT™ DOOR

The door opens and closes gently with grace and elegance.

WI-FI ENABLED FOR SMART CONTROL

The innovative wi-fi feature, powered by ThinQ® Technology, lets you cook and monitor from anywhere.

Innovation

Wi-Fi Enabled for ThinQ® Control with iPhone / Android App	Yes
Remote Operations	Yes

Upper Oven Features & Performance

Oven Type	Steam-Combi Convection
Capacity	4.7 cu. ft.
Cooking Modes	Convection Bake, Convection Roast, Bake, Broil, Auto Cook, Steam Cook (Steam-Combi, Gourmet Steam, Steam Sous Vide), Warm, Proof, My Recipes, RapidHeat Roast+
Interior Color	Blue
Oven Cleaning	Self Cleaning & Speed-Clean™
Variable Cleaning Time	Self Cleaning (3,4,5 hrs), Speed-Clean™ (10 min.)
Variable Broil	Yes (Full, Center / High, Med, Low)
Broil Element	2,500 W / 1,500 W
Bake Element	2,500 W
Steam Element	1,960 W
GlideShut™ Door	Yes
Oven Racks	2 Gliding, 1 Heavy Duty
Rack Positions	5
Oven Meat Probe	Yes
Automatic Shut Off (After 12 hrs.)	Yes
Star-K Certified Sabbath Mode	Yes
Interior Oven Lights (Auto & Manual)	2 Halogen
Convection System	True Convection
Convection Conversion	Yes
Convection Element	2,000 W
Proof	Yes
Variable Warm	Yes (High: 200°F, Med: 170°F, Low: 140°F)

©2025 LG Electronics USA, Inc. All rights reserved. "Signature Kitchen Suite" and the Signature Kitchen Suite logo are registered trademarks of LG Electronics Inc. Design, features and specifications are subject to change without notice. Specifications are for planning purposes only. Consult the product's installation instructions for final dimensional data and other details prior to making cutouts or custom panels. Consult with a heating and ventilation engineer for your specific ventilation requirements. Non-metric weights and measurements are approximate. Smart features require Internet access.

1-855-790-6655 | www.signaturekitchensuite.com

SKSDV3002S

DOUBLE WALL OVEN WITH STEAM-COMBI

SKS | SIGNATURE
KITCHEN
SUITE

Lower Oven Features & Performance

Oven Type	Convection
Capacity	4.7 cu. ft.
Cooking Modes	Convection Bake, Convection Roast, Bake, Broil, Auto Cook, Warm, Proof, My Recipe, Roast, RapidHeat Roast
Interior Color	Blue
Oven Cleaning	Self Cleaning & Speed-Clean™
Variable Cleaning Time	Self Cleaning (3,4,5 hrs), Speed-Clean™ (10 min.)
Variable Broil	Yes (Full,Center / High,Med,Low)
Broil Element	2,500 W / 1,500 W
Bake Element	2,500 W
GlideShut™ Door	Yes
Oven Racks	2 Gliding, 1 Heavy Duty
Rack Positions	5
Oven Meat Probe	No
Automatic Shut Off (After 12 hrs.)	Yes
Star-K Certified Sabbath Mode	Yes
Interior Oven Lights (Auto & Manual)	2 Halogen
Convection System	True Convection
Convection Conversion	Yes
Convection Element	2,000 W
Proof	Yes
Variable Warm	Yes (High: 200°F, Med: 170°F, Low: 140°F)

Controls

Oven	Knob+LCD Touch Screen
Display	7 inch LCD
Electronic Clock & Timer	Yes
Lock Out Function	Yes
Delay Start Time	Yes
Preheat Alarm Light	Yes
Audible Preheat Signal	Yes
Cooking Complete Reminder	Yes
Temperature Display (F or C)	Yes
Language Options	English, Spanish, French

Technical Specs

Rating (240V / 208V)	10.2 kW / 7.7 kW
Required Power Supply	240 / 208V, 50 Amp

Dimensions and Weight

Overall Width (inches)	29 3/4
Overall Depth Including Door (inches)	24 15/32
Overall Depth Including Handle (inches)	27
Overall Depth with Door Open (inches)	45 5/8
Overall Height (inches)	52 1/16
Size of Water Tank	1 Liter
Net Weight (approx.)	245 lbs
Shipping Weight (approx.)	276 lbs

Accessories

Included Accessories	Broiler Pan, Grid, 4 Gliding Racks, 2 Heavy Duty Racks, Meat Probe
----------------------	--

Warranty Summary*

Limited Warranty, Parts & Labor	3 Years
---------------------------------	---------


*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

SKSDV3002S


DOUBLE WALL OVEN WITH STEAM-COMBI

SKS | SIGNATURE
KITCHEN
SUITE

PRODUCT DIMENSIONS

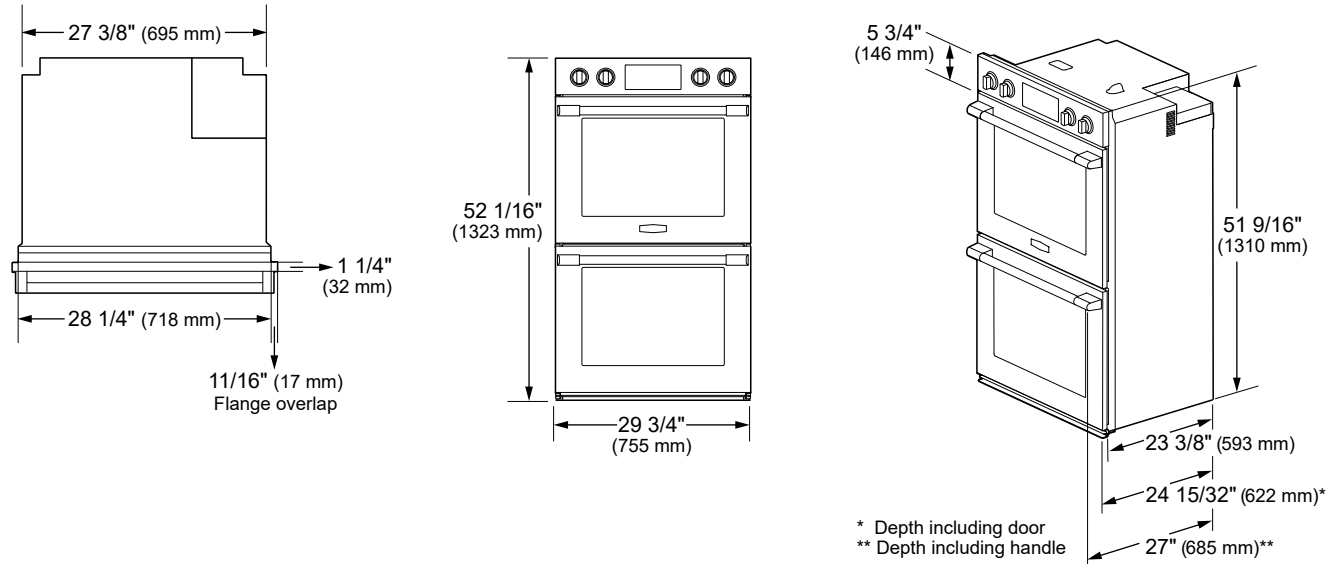

CUTOUT DIMENSIONS – PROUD INSTALLATION IN WALL CABINET

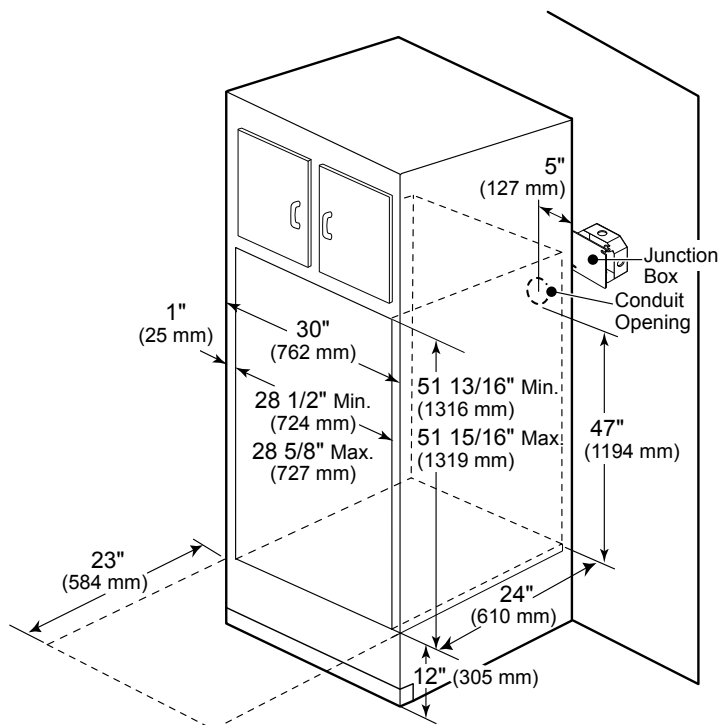

SKSFD4826P

48-INCH BUILT-IN FRENCH DOOR REFRIGERATOR

SKS | SIGNATURE KITCHEN SUITE



DUAL COMPRESSORS & DUAL EVAPORATORS FOR PRECISE PRESERVATION

Always keeps temperature fluctuation within $\pm 1^{\circ}\text{F}$ to enhance food freshness for longer period of time*. Separated cooling from refrigerator and freezer keeps compartments at optimized humidity.

CONVERTIBLE FRIDGE/FREEZER DRAWER

Innovative convertible fridge/freezer drawer offers five preset temperatures zones for precise food preservation: chilled wine, fridge deli, meats and seafood, cold drinks, or drop the temperature all the way down to make it a freezer when you need it.

INTERNAL WATER DISPENSER & DUAL ICE MAKER WITH CRAFT ICE®

The internal water dispenser delivers cold, fresh, filtered water with a simple touch. Options for both the slow-melting, spherical Craft Ice and frustum ice elevate beverages of all kinds.

PERFECTLY POSITIONED LED LIGHTING

Additional hidden LED lighting under the shelves means the interior is fully illuminated with lighting focused on the shelving.

*Based on TÜV Rheinland test results using LG's internal testing method measuring the average peak to peak temperature fluctuation in the fresh food compartment at the factory temperature setting under no load condition. Applicable models only. The result may vary in actual usage.

**Shown with professional stainless steel panel and handle accessory kit.

Style

Door Style	Panel Ready**
Interior Cabinet Finish	Metal

Innovation

Wi-Fi Enabled for ThinQ® Control with iPhone / Android App	Yes
Remote Operations	Yes
4 Drawer Design	Yes
Craft Ice® and Cubed Ice	Yes

Performance

Dual Smart Inverter Compressors	Yes
Dual Evaporators	Yes
Smart Cooling Plus® System	Yes
IcePlus®	Yes
Adaptive Defrost	Yes

Modes

Sabbath, IcePlus®, Demo, Icemaker On / Off, Power On / Off, Temp Control, Water Filter Reset, Smart Diagnosis, Wi-Fi, Smart Grid

Internal Water Dispenser	Yes
Water Filter (6 Months)	Yes
Fresh Air Filter	Yes

Capacity and Storage

Total Capacity (cu. ft.)	26.0
Refrigerator Capacity (cu. ft.)	18.35
Freezer Capacity (cu. ft.)	7.65
Full-Extension Freezer Storage Drawer	2 Soft Close / Self Close
Full-Extension Dual Icemaker Drawer	1 Soft Close / Self Close
Full-Extension Convertible Drawer	1 Soft Close / Self Close

Convertible Drawer Modes

Freezer (-7° to 5°F), Meat / Seafood (30°F), Cold Drinks (33°F), Fridge / Deli (37°F), Chilled Wine (41°F)

Convertible Drawer Dividers	1
-----------------------------	---

©2025 LG Electronics USA, Inc. All rights reserved. "Signature Kitchen Suite" and the Signature Kitchen Suite logo are registered trademarks of LG Electronics Inc. Design, features and specifications are subject to change without notice. Specifications are for planning purposes only. Consult the product's installation instructions for final dimensional data and other details prior to making cutouts or custom panels. Consult with a heating and ventilation engineer for your specific ventilation requirements. Non-metric weights and measurements are approximate. Smart features require Internet access.
1-855-790-6655 | www.signaturekitchensuite.com

SKSFD4826P

48-INCH BUILT-IN FRENCH DOOR REFRIGERATOR

Capacity and Storage (continued)

Storage Shelves	4 Adjustable w/LED Lighting, 1 Fixed
Lift and Go™ Crisper / Storage Drawers	2 Soft Close / Self Close
Aluminum Framed Door Bins (Holds 2-Liter Bottles)	6 Adjustable

General Features

LCD Touch Screen	Yes
Water Filter Indicator	Yes
Dual Ice Makers with Craft Ice®	Yes
Ice Production (24 Hrs.), Cubed	3.5 lbs (3.8 lbs with IcePlus®)
Ice Production (24 Hrs.) Craft Ice®	3 Clear or 6 Standard
Ice On / Off	Yes
Smart Grid Ready	Yes
Hidden LED Interior Lighting	Yes
Operating Temperatures	
Refrigerator: 33° to 43° F	
Convertible Drawer: 5 Preset Modes	
Freezer Drawers: -7° to 5° F	
Temperature Sensors	4
Door Alarm	Yes
Cooling System	Multi-Air-Flow Technology
Maximum Sound Level	39 dBA
Star-K Certified Sabbath Mode	Yes
ENERGY STAR® Certified	Yes

Installation Features

Four Point Front Adjustable with 5 Wheels	Yes
Attachment Method to Cabinetry	Top with No Visible Screws
Front Serviceable	Yes
Anti-tip Bracket Included	Yes

Technical Specs

Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Length	86 1/2"

Dimensions and Weight

Overall Width (inches)	47 1/4"
Overall Height (inches)	83 1/2" Min. – 84 3/16" Max.
Overall Depth Without Panel or Handles (inches)	23 7/8"
Net Weight (approx.)	668 lbs.
Shipping Weight (approx.)	725 lbs.

Optional Accessories

Replacement Water Filter	LT1000P-S
Refer to last page for additional accessories	

Warranty Summary*

Limited Warranty, Parts & Labor	3 Years
Limited Warranty, Sealed System and Compressor, Parts & Labor	5 Years
Limited Warranty Compressor, Parts Only	10 Years

*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

SKS | SIGNATURE
KITCHEN
SUITE

Technical drawing of the 300 Series 24-inch wide refrigerator, showing dimensions and installation requirements. The drawing includes a side view and a front view.

Dimensions and Installation Requirements:

- Finished Width:** 47 1/2" (1206.5 mm)
- Finished Depth:** 25" (635 mm) min. depth flush install; 24" (610 mm) min. depth proud install
- Finished Return:** 4" (102 mm)
- Electrical Location:** 5" (127 mm) from the bottom edge of the door.
- Water Location:** 4" (102 mm) from the bottom edge of the door.
- Electrical Location Not Available:** 13/8" (35 mm) from the bottom edge of the door.
- Minimum Height:** 84" min. (2134 mm)

Top view diagram showing dimensions and angles for the assembly:

- Overall width: 47 1/2" (1206.5 mm)
- Inner width: 47 1/4" (1200 mm)
- Top vertical dimension: 24" (610 mm)
- Top horizontal dimension (left): 11 1/2"* (292 mm)
- Top horizontal dimension (right): 11 1/2"* (292 mm)
- Top horizontal dimension (left, smaller): 1 1/4"* (32 mm)
- Top horizontal dimension (right, smaller): 1 1/4"* (32 mm)
- Top horizontal dimension (left, larger): 25 3/8" (644.5 mm)
- Top horizontal dimension (right, larger): 25 3/8" (644.5 mm)
- Top horizontal dimension (left, larger, smaller): 23 1/2" (596.5 mm)
- Top horizontal dimension (right, larger, smaller): 23 1/2" (596.5 mm)
- Top horizontal dimension (left, larger, smaller): 115°
- Top horizontal dimension (right, larger, smaller): 115°
- Top horizontal dimension (left, larger, smaller): 90°
- Top horizontal dimension (right, larger, smaller): 90°
- Top horizontal dimension (left, larger, smaller): 1/8" (3 mm) min.
- Top horizontal dimension (right, larger, smaller): 1/8" (3 mm) min.


Diagram illustrating the required clearance for the door hinge, showing a gap of $\frac{3}{4}$ " (19 mm) between the door and the frame.

Door Handle Clearances – The Door Handle depth must be added to the dimension noted to determine the total clearances required from adjacent cabinets or walls. This clearance will vary depending on the custom handle used. When using the Stainless Steel Door Panel Kit w/Handles or the Brushed Aluminum Handles (optional accessories), the door handle clearance with door open 115° is 12" (305 mm).

SKSFD4826P

48-INCH BUILT-IN FRENCH DOOR REFRIGERATOR

CUSTOM PANEL DIMENSIONS

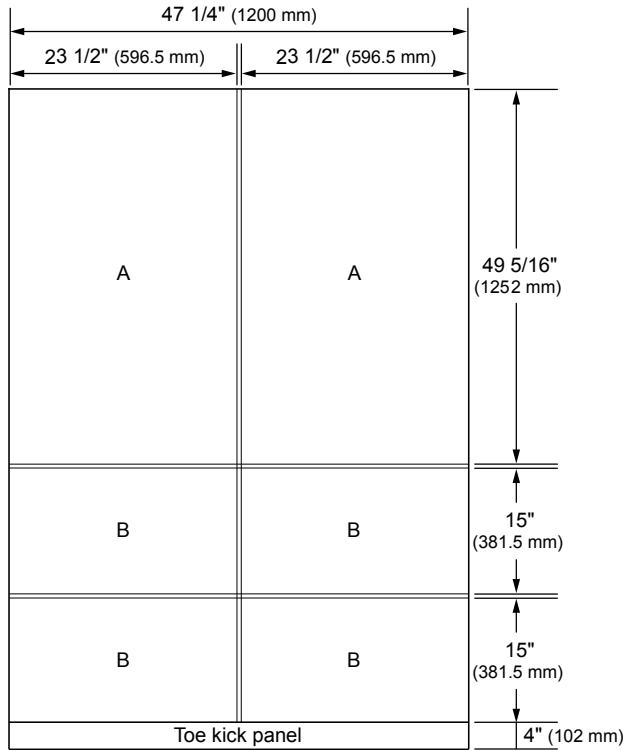

Notes

These units are designed to be customized with decorative panels. Field-installed custom door panels or an optional Stainless Steel Panel Kit is required.

For Custom Panels: Use templates provided with units to pre-drill holes for mounting panel brackets (provided with unit). Adjustment screws and instructions also provided with units.

Maximum Panel Weight:

A – Fresh food door panels: 33 lbs.

B – Drawer panels: 14 lbs.


Design Tips

4" (102 mm) will be visible on the interior sides of the furniture return. It is recommended that both sides of each cutout panel be finished to match the cabinet exterior.

If using custom panels, a custom toe kick is required. The bottom of case is unfinished.

Door Handles: Handles are not included with the refrigerator. Custom handles are required for installation. Brushed Aluminum Handles are available as an optional accessory.

OPTIONAL ACCESSORIES

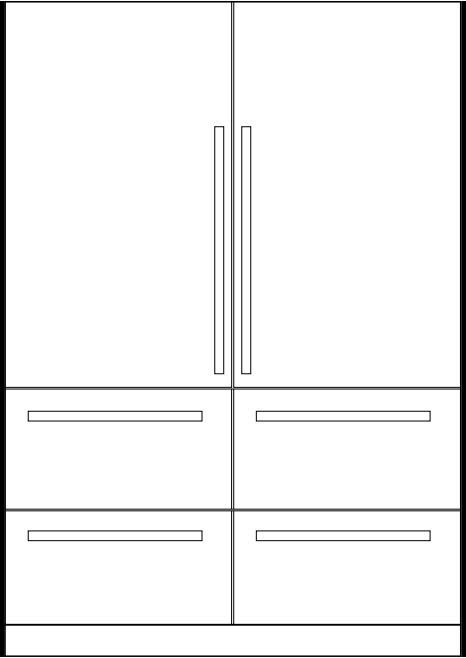

	Professional	Transitional
Stainless Steel Panel / Handle / Toekick Kit	SKSPK480FS	SKSPK480FMT
Retrofit Frame Kit	SKSFK800CS	
Brushed Aluminum Handle		
Medium – 31 11/16"	SKSHK310HS	SKSHK310HST
Short – 22 3/4" (for Drawers)	SKSHK230HS	SKSHK230HST

Order 2 Medium Handles and 4 Short Handles

SKSMD2401S

MICROWAVE OVEN DRAWER

SIGNATURE
KITCHEN SUITE



1.2 CU. FT. OVEN CAPACITY

1.2 cu. ft. capacity is designed to provide plenty of room to heat large items like casserole dishes and dinner platters.

EASY TOUCH AUTOMATIC DRAWER

The Easy Touch Automatic Drawer system eases open with a gentle pull or the touch of a button. Give the drawer a small nudge and it smoothly shuts for you. The even, gliding action and solid construction prevents liquids from spilling during opening and closing.

SMOOTHTOUCH™ GLASS CONTROLS

Intuitive SmoothTouch™ Glass Controls not only look sleek but make operating the microwave drawer easy with just a touch. The seamless controls are also easy to wipe clean.

INSTALLATION FLEXIBILITY

Flexible installation options include below an island or peninsula and in standard cabinetry. A heat deflector kit is included for flush or true flush installation for an integrated, streamlined look.

Features

Capacity	1.2 cu. ft.
Power Output	900 W
Sensor Cooking	Yes
Drawer Opening	Easy Touch Automatic
Lighting	Incandescent

Cooking Menu

Display Type	SmoothTouch™ Glass Touch
Power Levels	11
Sensor Touch Cooking / Reheat Options	12 (Baked Potatoes, Sweet Potatoes, Fish / Seafood, Brown Rice, White Rice, Quick Fresh Vegetables, Longer Fresh Vegetables, Steamer Bag, Frozen Vegetables, Ground Meat, Frozen, Beverage Reheat)
Defrost Options	6 (Ground Meat, Steaks/Chops, Boneless Poultry, Bone-in Poultry, Roast, Casserole/ Soup)
Minute Plus™	Yes
Stop/Clear, Start/Enter	Yes
Completion Beeper	Yes
Energy Saving Mode	Yes (Dims Display After 3 Minutes of Inactivity)
Kitchen Timer/Clock	Yes
Child Safety Lock	Yes

© 2020 Signature Kitchen Suite. All rights reserved. Design, features and specifications are subject to change without notice. Specifications are for planning purposes only. Consult the product's installation instructions for final dimensional data and other details prior to making cutouts or custom panels. Consult with a heating and ventilation engineer for your specific ventilation requirements. Non-metric weights and measurements are approximate. Smart features require Internet access.

1-855-790-6655 | www.signaturekitchensuite.com

SKSMD2401S
MICROWAVE OVEN DRAWER

Installation Features

Deflector Vent Kit Included (Required for Flush and True Flush Installation)	Yes
--	-----

Technical Specs

Required Power Supply	120V, 60Hz / 15 Amp
Plug Type	3-Prong
Power Cord Length (inches)	48


Dimensions and Weight

Overall Exterior Width (inches)	23 7/8
Overall Exterior Height (inches)	15 15/16
Overall Exterior Depth (inches)	23 1/64
Required Cutout Width (inches)	22 1/8
Required Cutout Height (inches)	15 9/16
Required Cutout Depth (inches)	23 1/2
Interior Width (inches)	17 5/16
Interior Height (inches)	7 1/8
Interior Depth (inches)	16 9/16
Net Weight (approx.)	74 lbs
Shipping Weight (approx.)	88 lbs


Warranty Summary*

Limited Warranty, Parts & Labor (In Home Service)	3 Years
Limited Warranty on Magnetron (In Home Service)	10 Years

OVERALL PRODUCT DIMENSIONS

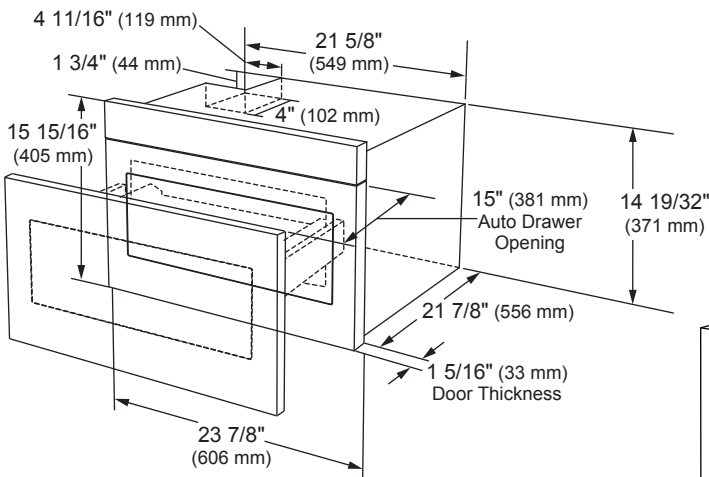

MOUNTING SCREW LOCATIONS

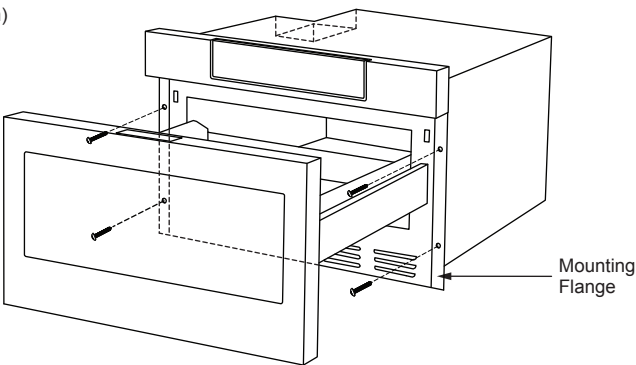

*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

SIGNATURE

KITCHEN SUITE

Diagram illustrating the dimensions and installation requirements for a kitchen cabinet with a sink and countertop.

Dimensions:

- Countertop Height: 36" (914 mm)
- Cabinet Minimum Depth: 23 1/2" (597 mm)
- Sink Width: 22 1/8" (562 mm)
- Sink Depth: 15 9/16" (395 mm)
- Countertop Thickness: 1 1/2" (38 mm)
- Sink Mounting Block Height: 4" (101 mm)
- Sink Mounting Block Width: 6" (152 mm)
- Anti-Tip Block Height: 3 1/2" (89 mm)
- Distance from Bottom of Anti-Tip Block to Bottom of Sink: 14 13/16" (376 mm)
- Distance from Bottom of Sink to Bottom of Cabinet: 15 9/16" (395 mm)
- Distance from Bottom of Cabinet to Bottom of Sink: 14 13/16" (376 mm)
- Distance from Bottom of Cabinet to Bottom of Sink (Total): 29 1/2" (750 mm)
- Distance from Bottom of Cabinet to Bottom of Sink (Total): 29 1/2" (750 mm)
- Distance from Bottom of Cabinet to Bottom of Sink (Total): 29 1/2" (750 mm)

Installation Requirements:

- A - Allow 7/8" (22 mm) overlap
- B - Allow 3/16" (5 mm) overlap
- C - Allow 7/16" (11 mm) minimum space
- D - Allow 1/8" (3 mm) overlap

Other Labels:

- Suggested electrical outlet location*
- Anti-Tip Block

Page 3 of 6 | Effective 7/20 | WCAG



22.3 Cu. Ft. 36" Counter Depth Side by Side Refrigerator

Side-By-Side Refrigerator

Available Products: PRSC2222AF

Available Colors: Stainless Steel

Version: 05/23

Product Specifications

Dispenser

Crushed Ice	Yes
Cube Ice	Yes
Dispenser	Yes
Dispenser Location	External
Dispenser Height	8 3/10"
Light Control	Yes
Water	Yes

Freezer

Automatic Defrost	Yes
Baskets / Bins Color	Smokey
Baskets / Bins Material	Plastic
Door Bin Color	Smokey
Drawer Color	Smokey
Interior Lighting	LED
Pizza / Ice Cream Shelf	Yes
Shelf Material	Glass
Number of Adjustable Door Bins	4
Number of Baskets / Bins	2
Total Number of Door Bins	4
Number of Fixed Shelves	3
Total Number of Shelves	3
Number of Drawers	2

Controls

Air Filter Indicator	Yes
Control Location	Side of Door
Digital Display	Yes
Door Ajar Alarm	Yes
Control Lock	Yes
Ice Maker On/Off	Yes
Power Failure Alarm	Yes
Power On/Off	Yes
Sabbath Mode	Yes
Second Control Location	Dispenser
Water Filter Indicator	Yes

Refrigerator

Air Filter	Yes
Air Filter Included	Yes
Air Filtration	Yes
Crisper Color	Smokey
Dairy Bin	Yes
Deli Drawer	Yes
Door Bin Color	Smokey
Humidity Controls	Manual
Interior Lighting	LED
Produce Keeper Ready	Yes
Produce Keeper Included	Yes
Shelf Material	Glass
Water Filter	Yes
Number of Adjustable 2 Liter Door Bins	2
Number of Adjustable Condiment Door Bins	1
Number of Adjustable Gallon Door Bins	1
Total Number of Door Bins	4
Number of Adjustable Shelves	3
Number of Crispers	2

Ice Maker

Ice Maker	Yes
Ice Maker Location	Frozen Section
Ice Shape	Pyramid

Exterior

Counter-Depth	Yes
Door Finish	Smooth
Door Stops	Yes
Front Rollers	Yes
Rear Rollers	No
Water Inlet Location	Right Bottom Rear

Electrical Specifications

Minimum Circuit Required	15 Amps
--------------------------	---------

22.3 Cu. Ft. 36" Counter Depth Side by Side Refrigerator	Side-By-Side Refrigerator
Available Products: PRSC2222AF	Available Colors: Stainless Steel
Version: 05/23	

Dimensions and Volume

Height With Hinge	69 7/8"
Height Without Hinge	68 5/8"
Width	36 1/8"
Width of Cabinet	35 7/8"
Depth of Cabinet	23 7/8"
Depth With Door	28 1/2"
Depth With Door 90° Open	45"
Depth With Door and Handle	31"
Freezer Capacity	8 Cu. Ft.
Fresh Food Capacity	14.3 Cu. Ft.
Total Capacity	22.3 Cu. Ft.

General Specifications

Annual Energy	615 kWh
Leveling Legs	Yes
Prop 65 Label	Yes
Refrigerant Type	R-600A
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Performance Certifications and Approvals

ENERGY STAR Certified	Yes
-----------------------	-----


Certifications and Approvals

ADA Compliant*	Yes
*ADA Compliant Disclaimer	Accessibility pursuant to Uniform Federal Accessibility Standards (UFAS) when used with optional water filter bypass.

Safety Certifications and Approvals

UL Listed	Yes
-----------	-----

Installation Diagram

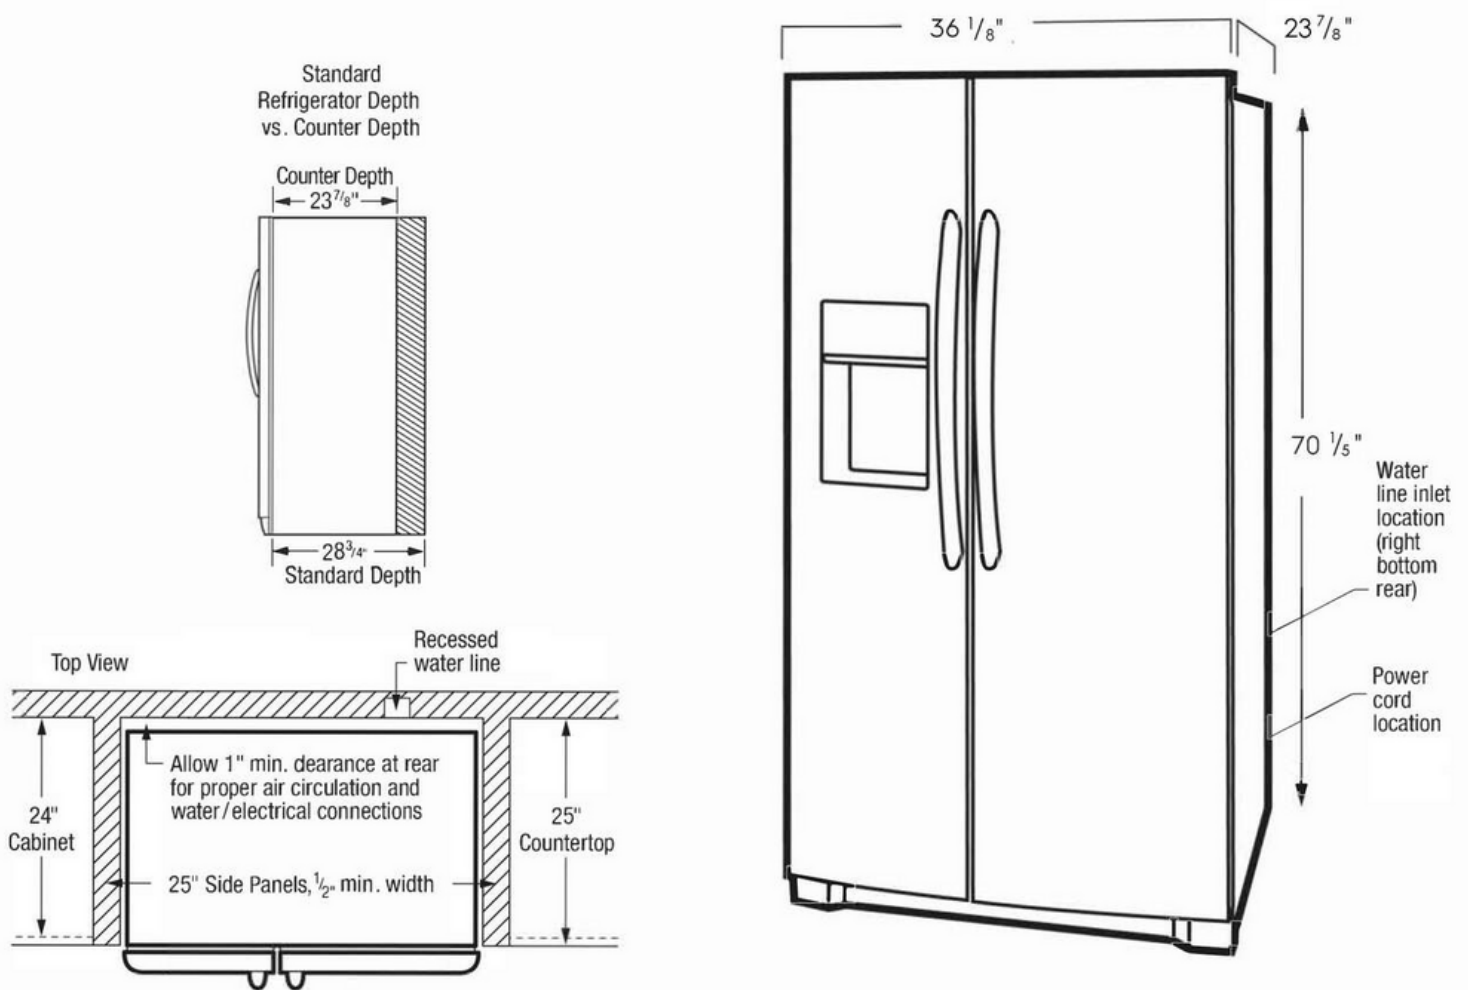

BRISAS SINGLE ZONE BEVERAGE COOLER

brisas
BY ZEPHYR
BRISASBYZEPHYR.COM



Transparent-Gray Glass Shelves



PreciseTemp™

TOP FEATURES

38°

PreciseTemp™
Multiple internal sensors help maintain accurate temperatures



Vibration Dampening System
Noise and vibration is reduced to minimize wine disturbance



Active Cooling Technology
An on-board computer controls active cooling fans to provide temperature stability and even cooling



Field-Reversible Door
Comes standard with field-reversible door brackets included

BRISAS SINGLE ZONE BEVERAGE COOLER

brisas

BY ZEPHYR

BRISASBYZEPHYR.COM

MODEL

Beverage Display Cooler BBV24C01AG

Size

24"

Dimensions

23-7/8"W x 33-7/8"H x 23-1/2"D

Weight

114lbs.

Installation Type

Compact / Built-in / Freestanding

Refrigerant Type

R600a

FEATURES

Capacity 8 bottles (750 ml), 112 12oz cans

Volume 5.8 cu/ft

Temperature Range 38° - 65° F

Sound Level 40 dBA

Seamed Door Finish 304-grade Stainless + Glass

Cabinet Finish Black

Interior Finish Black

Field-Reversible Door Yes

Zero-Clearance Door Hinge Yes

Door Glass Dual-pane

Shelving 1 black wire rack w/ black trim

2 transparent-gray glass shelves

Controls Electronic Capacitive Touch

Lighting Blue LED

Door Open Alarm Yes, after 3 minutes

Sabbath Mode Yes

Commercial Certified Yes

Air Filtration Yes, w/ carbon filter

PreciseTemp™ Yes

Active Cooling Technology Yes

Vibration Dampening System Yes

AC POWER

115V, 60Hz at Max. 1.0A




OPTIONAL ACCESSORIES

Adjustable Drink Caddy PRDC-C03

WARRANTY

2 years parts, 5 years compressor

1 year labor

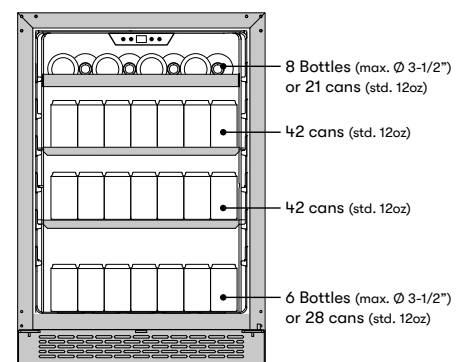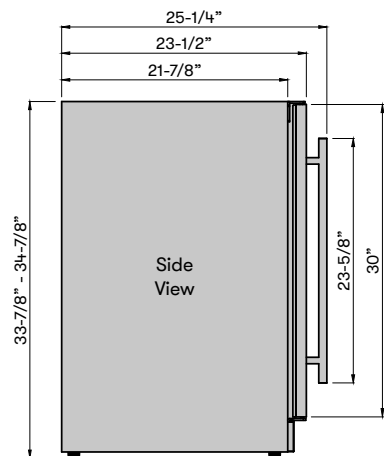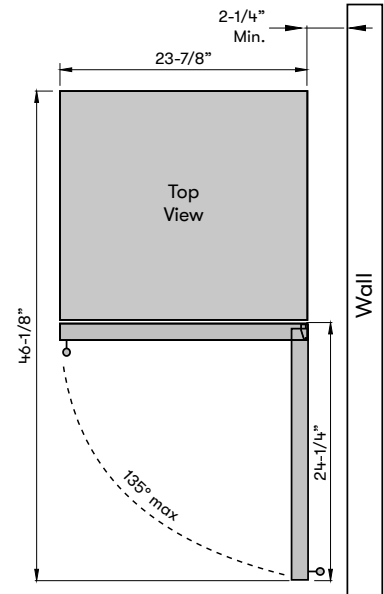

BRISAS SINGLE ZONE BEVERAGE COOLER

brisas
BY ZEPHYR
BRISASBYZEPHYR.COM



Transparent-Gray Glass Shelves



PreciseTemp™

TOP FEATURES

38°

PreciseTemp™
Multiple internal sensors help maintain accurate temperatures



Vibration Dampening System
Noise and vibration is reduced to minimize wine disturbance



Active Cooling Technology
An on-board computer controls active cooling fans to provide temperature stability and even cooling



Field-Reversible Door
Comes standard with field-reversible door brackets included


Model No. C3SL36

36" SL-Series Built-In Gas Grill

COYOTE³
Outdoor Living



Exterior



FEATURES

- Analog Temp Gauge
- Interior Light Switch
- Newly Handle & End Cap
- Newl Knob & Bezel (Multi-Light)
- 304 SS Construction
- Double Walled Hood
- Smudge Proof Control Panel
- Throw Light



FEATURES

- Halogen Lighting
- 20K Btu Infinity Burners (Interchangeable)
- 304ss Laser Cut Grates
- Volcanic Stone Ceramic Briquettes
- Infrared Rear Burner
- Flame Thrower Ignition
- Integrated Wind Guard
- Spring Assisted Hood
- Heat Zone Separators
- Safety Valves (Thermocouple)
- Sear Burner

ACCESSORIES

- Griddle (C1GRDL)
- Rotisserie Kit (CROT36)
- Ceramic Briquettes (C3BRIQ36)
- Charcoal Tray (CCHTRAY12)
- Insulated Jacket (CJAKTCS36)
- Cover (CCVR36-BIG)
- Color Knob Inserts: CKNOBBK, CKNOBY, CKNOBSS, CKNOBR, CKNOBC
- Griddle Grate: C3SLSIGRATE36G | Beef Grate: C3SLSIGRATE36B
- Veggie Grate: C3SLSIGRATE36V | Poultry Grate: C3SLSIGRATE36P

DIMENSIONS

- Overall: 23" H x 35.5" W x 25.5" D
- Cutout: 10.25" H x 32.5" W x 20.5" D




Interior

C3SL36 INSTALL GUIDE

NON-COMBUSTIBLE CONSTRUCTION


Insulated Jacket NOT Required

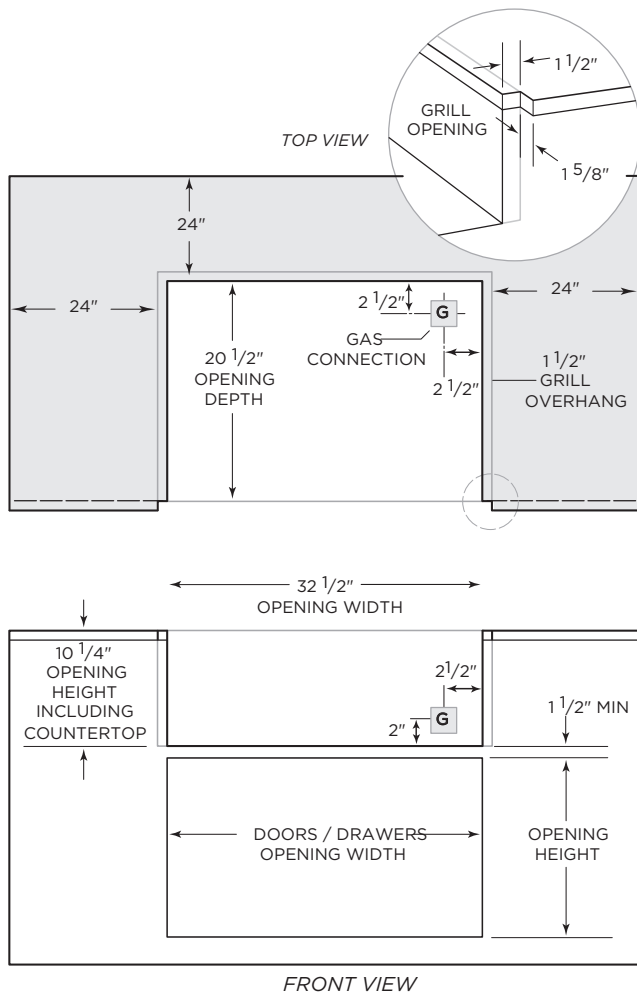

- ✓ Combustible material can not be within 24" of the grills frame
- ✓ This applies to all directions - horizontal & vertical
- ✓ Shaded area above on "TOP VIEW" illustrates the 24" minimum requirement (not to scale for rendering purposes)
- ✓ The grill is designed to hang from the counter top with no support underneath
- ✓ Minimum rear clearance for the hood to open is 2"
- ✓ If you have a wall/partition behind the grill, the minimum rear clearance to that wall should be at least 7" to allow for ventilation of the exhaust

COMBUSTIBLE CONSTRUCTION

Insulated Jacket Required - Model # CJAKTCS36

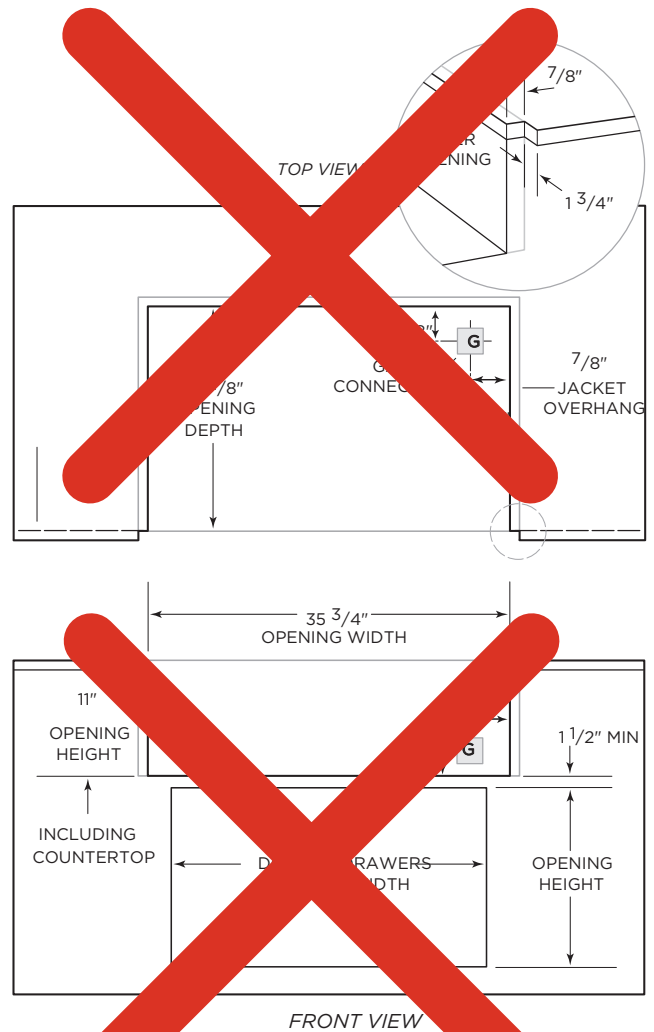

- ✓ If using combustible material within 24" of the grill, you MUST use the correct fitting Coyote Insulated Jacket
- ✓ Using a insulated jacket, does not waive any other standard installation procedure (ventilation, connections, etc)
- ✓ The jacket is designed to hang from the counter top with no support underneath
- ✓ Minimum clearance for hood to open is 2"
- ✓ If you have a wall/partition behind the grill, the minimum rear clearance to that wall should be at least 7" to allow for ventilation of the exhaust

Ventilation Requirements:

- ✓ Regardless if you are using a combustible or non-combustible building material, you must include at least two vents within the island.
- ✓ These vents must be at least 20 sq. in. each and allow fresh air to move from the grill cabinet to the exterior environment.
- ✓ For a propane setup, the vents should be installed lower as propane is heavier than air.
- ✓ For a natural gas setup, the vents should be located higher in the island, as natural gas is lighter than air.
- ✓ Do not locate the two vents on the same wall of the island. Cross ventilation is key to allow any excess heat or trapped gas to dissipate.

Important Note to Installer: This file is not intended to replace your Owners' Manual which contains specific safety requirements and consumer guidelines. Please refer to your Owners' Manual prior to installing or operating your built-in grill.



Model No. Access Doors

Single & Double Access Doors

COYOTE³
Outdoor Living



C3-SA2014
C3-SA2417




C3-SA1420
C3-SA1724



C3-DA2426
C3-DA2431
C3-DA2436
C3-DA2439

FEATURES

- 304ss Construction
- Soft Close Hinge
- New Handle & End Cap
- Beveled Trim
- Larger Install Flange

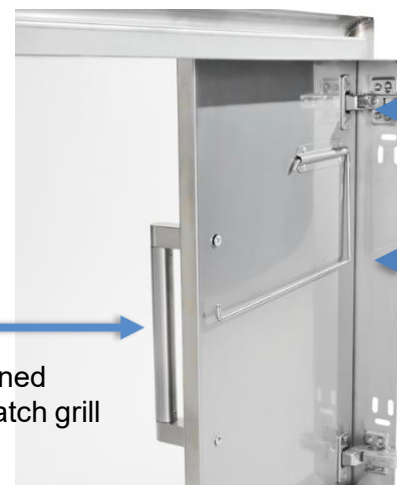

FEATURE:

- Newly designed handle to match grill

FEATURE:

- Soft close hinge

FEATURE:

- Larger flange for easier installation

Overall Product Dimensions

Model No.	Height	Width	Depth
C3-SA2014	22"	16"	5"
C3-SA2417	26"	19"	5"
C3-SA1420	16"	22"	5"
C3-SA1724	19"	26"	5"
C3-DA2426	24"	24 1/4"	5"
C3-DA2431	24"	30"	5"
C3-DA2436	24"	35 1/2"	5"
C3-DA2439	24"	38"	5"

Cutout Dimensions


Model No.	Height	Width	Depth
C3-SA2014	20 1/2"	14 1/2"	2"
C3-SA2417	24 1/2"	17 1/2"	2"
C3-SA1420	14 1/2"	20 1/2"	2"
C3-SA1724	17 1/2"	24 1/2"	2"
C3-DA2426	20 1/2"	20 3/4"	2"
C3-DA2431	20 1/2"	26 1/2"	2"
C3-DA2436	20 1/2"	31 3/4"	2"
C3-DA2439	20 1/2"	34 1/2"	2"




48" model shown with optional 12" duct cover





48" model shown with optional telescopic duct cover

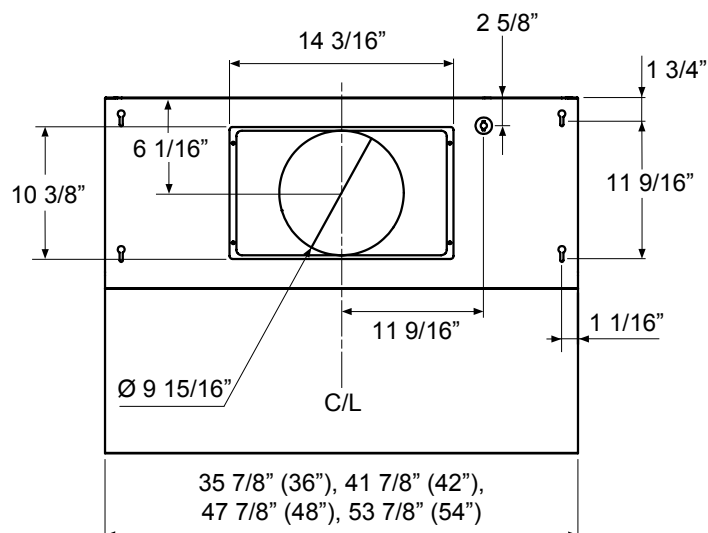

TOP

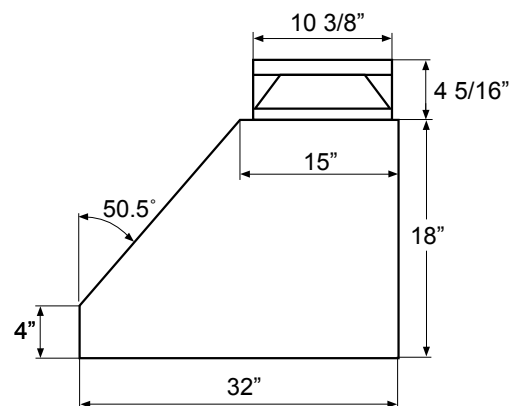

SIDE

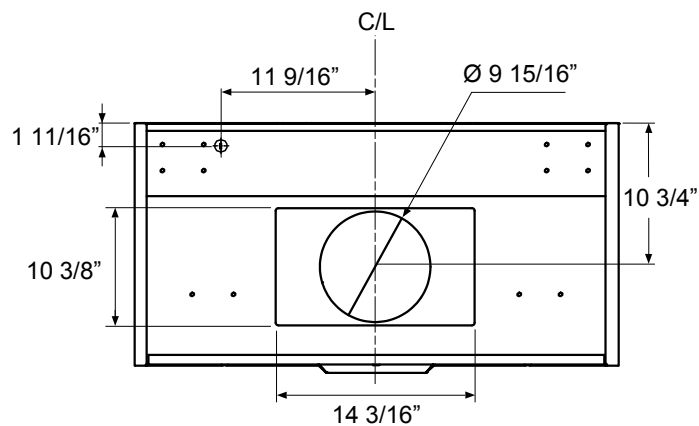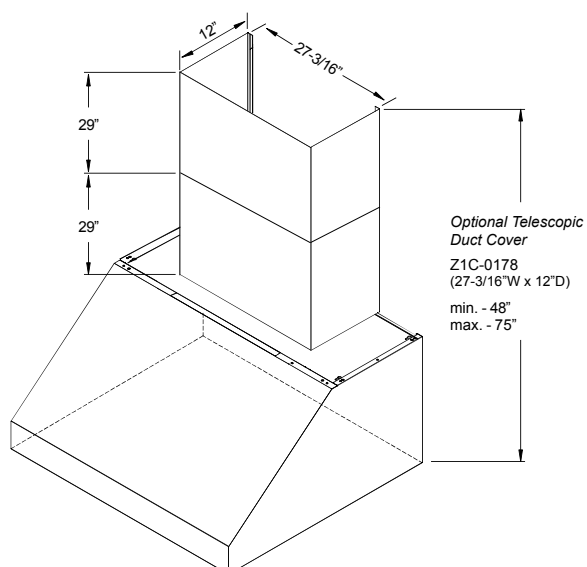

BACK

MODEL				
Stainless Steel	AK7836CS	AK7842CS	AK7848CS	AK7854CS
Size	36" (35-7/8")	42" (41-7/8")	48" (47-7/8")	54" (53-7/8")
BLOWER PERFORMANCE				
Blower CFM (Min. - Max.)	450 - 1,200	450 - 1,200	450 - 1,200	450 - 1,200
Sones (Min. - Max.)	3.5 - 9	3.5 - 9	3.5 - 9	3.5 - 9
FEATURES				
Controls	Metallic Knob	Metallic Knob	Metallic Knob	Metallic Knob
Speed Levels	3	3	3	3
Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x2	LumiLight LED, 6W x4	LumiLight LED, 6W x4
Dual-Level Lighting	Yes	Yes	Yes	Yes
Filters	Pro Baffle x3	Pro Baffle x3	Pro Baffle x4	Pro Baffle x4
Recirculating Option	No	No	No	No
High Quality Stainless Steel	304S	304S	304S	304S
DUCT SPECIFICATIONS				
Vertical Internal Blower	10" Round	10" Round	10" Round	10" Round
Horizontal Internal Blower	10" Round	10" Round	10" Round	10" Round
AC POWER	120V, 60Hz at Max. 9A	120V, 60Hz at Max. 9A	120V, 60Hz at Max. 9A	120V, 60Hz at Max. 9A
OPTIONAL ACCESSORIES				
12" Duct Cover	AK0736BS	AK0742BS	AK0748BS	AK0754BS
Duct Cover (10' - 12' ceilings)	Z1C-0178	Z1C-0178	Z1C-0178	Z1C-0178
MOUNTING HEIGHT RANGE*				
	30" - 36"	30" - 36"	30" - 36"	30" - 36"
WARRANTY				
	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor

*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.